



# 381 SERIES

VAPOR PROOF

DATE: _____	PROJECT MGR: _____
JOB: _____	
CAT#: _____	
TYPE: _____	



Pendant Mount



Ceiling Mount



Box Mount



Bracket/Box Mount

TASK ①

PAINTBOOTH ②

VAPOR DUST ③

VAPOR ④

WET DAMP ⑤

MARINE ⑥

EXPLOSION PROOF ⑦

HID ⑧

INSPECTION ⑨

PORTABLE LIGHTING ⑩

MOUNTING ⑪

PHOTOMETRY ⑫

LAMPS BALLASTS ⑬

INFO ⑭

CUSTOM ⑮

ASK THE EXPERT ⑯

## DESCRIPTION

The 381 Series is cast aluminum in construction that allows for 13-22 watts in compact fluorescent lamps or up to 300 watts if incandescent lighting using a medium base socket. The product is suitable for wet locations and vapor-proof, making it easy to hose down for cleaning if necessary. The 381 Series is available in four mounting options and has optional dome and angle reflectors.

## SPECIFICATIONS

LISTINGS: UL listed 1598  
Certified for wet locations.



FEATURES: Suitable for wet and non-hazardous locations  
Vapor proof Incandescent/fluorescent light fixture  
High temperature silicone internal gaskets  
Premium porcelain socket with 150°C 8" long leads attached.

HOUSING: Cast aluminum construction

ELECTRICAL: Easy relamping with single thumb screw

APPLICATIONS: Non-hazardous locations

REFLECTOR: Optional dome or angle reflector. See options on next page.

MOUNTING: Available in pendant, ceiling, box or stanchion mount  
Fixtures come standard with 1/2" hub size with 3/4" optional.

OPTIONS: See next page




# 381 SERIES

## VAPOR PROOF

### PART NUMBERS

- ① TASK
- ② PAINTBOOTH
- ③ VAPOR DUST
- ④ VAPOR
- ⑤ WET DAMP
- ⑥ MARINE
- ⑦ EXPLOSION PROOF
- ⑧ HID
- ⑨ INSPECTION
- ⑩ PORTABLE LIGHTING
- ⑪ MOUNTING
- ⑫ PHOTOMETRY
- ⑬ LAMPS BALLASTS
- ⑭ INFO
- ⑮ CUSTOM
- ⑯ ASK THE EXPERT

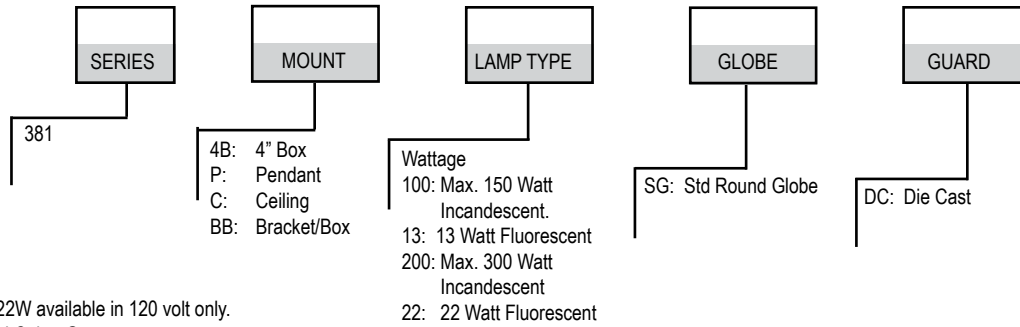


**NOTE:**

- 13W & 22W available in 120 volt only.
- Standard Color: Gray
- Globe Options and Colors Available  
Consult factory for availability
- Colored Housing Available  
Consult factory for availability
- Lamps available, consult factory for pricing




### OPTIONS

**Standard Dome Reflector**  
100 Watt: P/N 3943  
200 Watt: P/N 3945

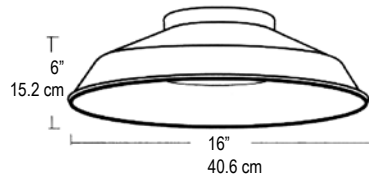

Direct light down with a dome reflector. Highly reflective finish over heavy gauge aluminum base. Field installation with 4 screws. Does not fit EB bracket fixtures.


**Angle Reflector**  
100 Watt: P/N 3944  
200 Watt: P/N 3946

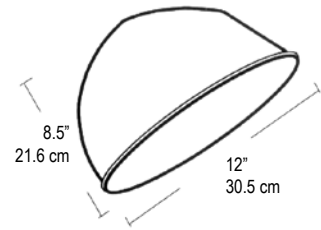


Direct light down and to the side with a 30° angle reflector. Highly reflective white epoxy finish over heavy gauge aluminum base. Field installation with 4 screws.

### DIMENSIONS


**381 Pendant Mount**

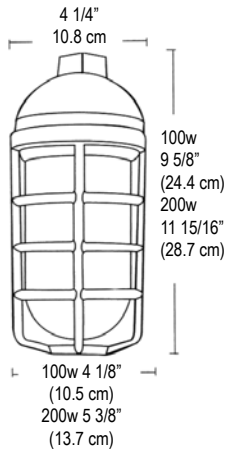


**381 Ceiling Mount**

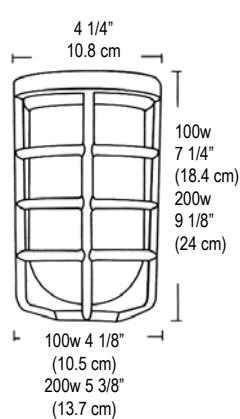

**381 Box Mount**

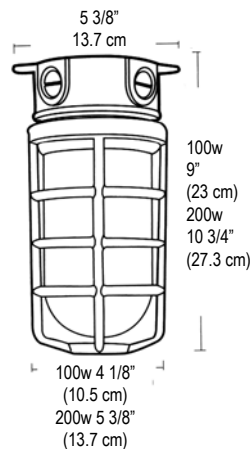

**381 Bracket/Box Mount**

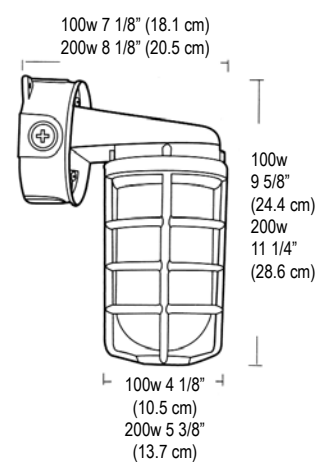

**NOTE:**  
100W Incandescent and 13W Fluorescent are the same measurement  
200W Incandescent and 22W Fluorescent are the same measurement