



Photometric Report (Type C)

Filename: 390229H-3546.IES
[TEST] 21246
[MANUFAC] LDPI LIGHTING - SUSPENDED LUMINAIRE - INDUSTRIAL
[LUMCAT] 3902291-3546
[LUMINAIRE] WITH WHITE INTERIOR AND NO LENS
[LAMPCAT] F32T8/TL841. LUMEN RATING = 2950 LMS.
[LAMP] FOUR PHILIPS 32 WATT T8 LAMPS

Maximum Candela = 2798.6 at 67.5 H 10 V


Classification:

Road Classification: Type V, Very Short, Full Cutoff (deprecated)
Upward Wast Light Ratio: 0.00
Luminaire Efficacy Rating (LER): 92
Indoor Classification: Direct
BUG Rating : B3-U0-G2

Polar Candela Curves:

Vertical Plane Through:
1) 67.5 - 247.5 Horizontal

Horizontal Cone Through:
2) 10 Vertical

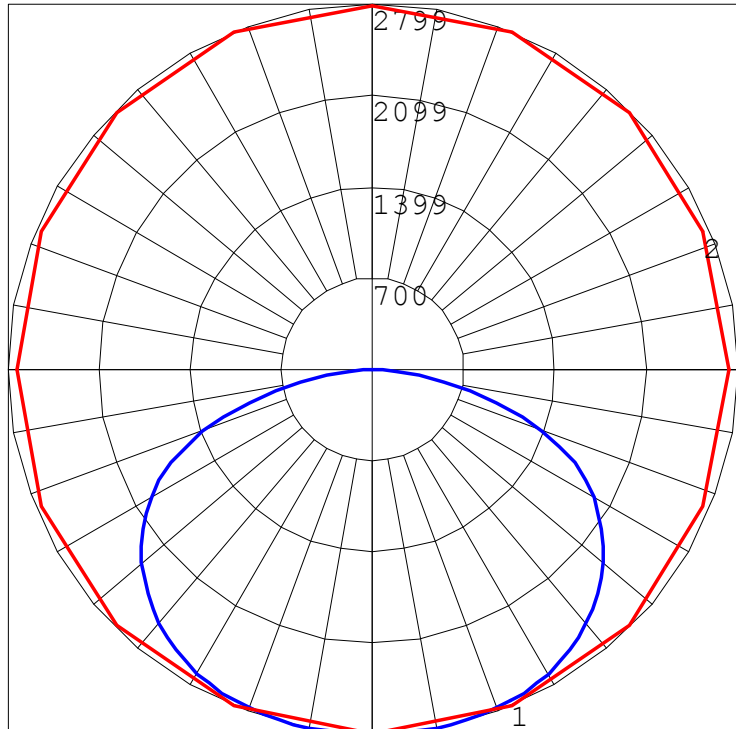



Photometric Report (Type C)

Filename: 390229H-3546.IES
 [TEST] 21246
 [MANUFAC] LDPI LIGHTING - SUSPENDED LUMINAIRE - INDUSTRIAL
 [LUMCAT] 3902291-3546
 [LUMINAIRE] WITH WHITE INTERIOR AND NO LENS
 [LAMPCAT] F32T8/TL841. LUMEN RATING = 2950 LMS.
 [LAMP] FOUR PHILIPS 32 WATT T8 LAMPS

Maximum Candela = 2798.6 at 67.5 H 10 V

Classification:

Road Classification: Type V, Very Short, Full Cutoff (deprecated)
 Upward Waste Light Ratio: 0.00
 Luminaire Efficacy Rating (LER): 92
 Indoor Classification: Direct
 BUG Rating : B3-U0-G2

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	1132.4	9.6	11.5
FM (30-60)	2496.2	21.2	25.3
FH (60-80)	1190.4	10.1	12.1
FVH (80-90)	115.1	1.0	1.2
BL (0-30)	1132.4	9.6	11.5
BM (30-60)	2496.2	21.2	25.3
BH (60-80)	1190.4	10.1	12.1
BVH (80-90)	115.1	1.0	1.2
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	9868.2	83.8	100.0
BUG Rating	B3-U0-G2		

