



## Photometric Report (Type C)

Filename: 384-265.IES  
[MANUFAC] LDPI COMPANY DIVISION OF LPI INC.  
[LUMCAT] 384-265  
[LUMINAIRE] EXTRUDED ALUMINUM HOUSING WITH CAST END  
CAPS WHITE PAINTED REFLECTOR 1/8 IN ACRYLIC LENS  
[LAMP] (2) F32T8 LINEAR FLUORESCENTS  
[BALLAST] ADVANCE ICN2P32SCHAZ

Maximum Candela = 798.849975585938 at 67.5 H 15 V


### Classification:

Road Classification: Type V, Very Short, Full Cutoff (deprecated)  
Upward Wast Light Ratio: 0.00  
Luminaire Efficacy Rating (LER): 10  
Indoor Classification: Direct  
BUG Rating : B1-U1-G1

### Polar Candela Curves:

Vertical Plane Through:  
1) 67.5 - 247.5 Horizontal

Horizontal Cone Through:  
2) 15 Vertical

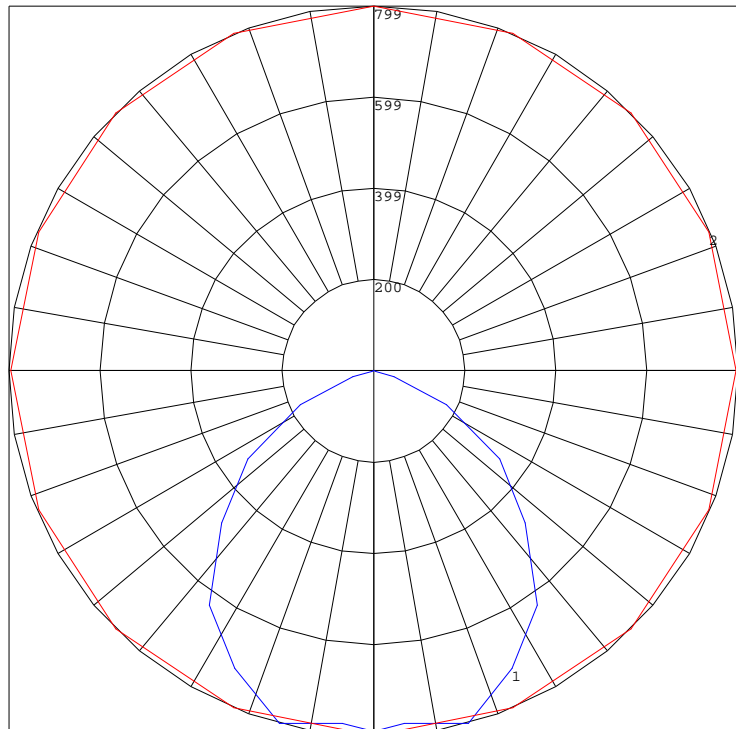



## Photometric Report (Type C)

Filename: 384-265.IES  
 [MANUFAC] LDPI COMPANY DIVISION OF LPI INC.  
 [LUMCAT] 384-265  
 [LUMINAIRE] EXTRUDED ALUMINUM HOUSING WITH CAST END  
 CAPS WHITE PAINTED REFLECTOR 1/8 IN ACRYLIC LENS  
 [LAMP] (2) F32T8 LINEAR FLUORESCENTS  
 [BALLAST] ADVANCE ICN2P32SCHAZ

Maximum Candela = 798.849975585938 at 67.5 H 15 V

### Classification:

Road Classification: Type V, Very Short, Full Cutoff (deprecated)  
 Upward Waste Light Ratio: 0.00  
 Luminaire Efficacy Rating (LER): 10  
 Indoor Classification: Direct  
 BUG Rating : B1-U1-G1

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	226.0	4.0	11.4
FM (30-60)	552.7	9.9	27.9
FH (60-80)	194.1	3.5	9.8
FVH (80-90)	18.0	0.3	0.9
BL (0-30)	226.0	4.0	11.4
BM (30-60)	552.7	9.9	27.9
BH (60-80)	194.1	3.5	9.8
BVH (80-90)	18.0	0.3	0.9
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	1981.6	35.4	100.0
BUG Rating	B1-U1-G1		

