


Meets all Coast Guard specifications. Streamlined design provides eye appeal and ruggedness. Designed to withstand strong vibration. T4 (135° C) operating code. Adjustable mounting brackets and lamps included. Straight in lamp holders. ADJUSTABLE MOUNTING BRACKETS AND LAMPS INCLUDED.



1 SERIES	2 LAMP TYPE	3 LAMP QUANTITY	4 LENGTH	5 VOLTAGE	6 OPTIONS
384	T8: 17W or 32W T5HO: 24W or 54W	2L: 2 lamps	2: 2 Ft. 4: 4 Ft.	UNV1: Universal 120-277V 50/60Hz 120: 120V 50/60Hz 277: 277V 50/60Hz	EM: Battery/Driver Backup (90 Min.) (4Ft, T8 fixture only)
				Notes: Adjustable Mounting brackets and lamps included. Multiple voltages available, consult factory. For chemical resistance information please see website.	

LISTINGS

UL 844
 CSA 22.2 No. 137.0
 UL 1598A Marine Outside
 UL 1598 Wet / Damp
 CSA 22.2 No. 250.0
 Cl D2 Grps A,B,C,D T4 135°C
 40°C Ambient Rating

FEATURES

Corrosion resistant, low copper content aluminum
 Zinc plated latches are standard
 3/4" hubs
 Neoprene gasket
 Easy access to fluorescent ballast and internal wiring

LENS

1/8" Clear acrylic lens is heat and shatter resistant.

MOUNTING

Versatile Mounting arrangements.
 Brackets come standard

ELECTRICAL

Available in AC
 Available in 17, 24, 32 and 54 watts
 T5HO and T8
 Voltages: 120, 220 and 120-277

OPTIONS

EM: Battery/Driver Backup (90 Min.) (4 Ft., T8 fixture only)
 Stainless steel latches


384

HAZARDOUS LIGHTING

Oil/Gas • Pulp/Paper • Shipyards/Marine • Water Treatment • Drill Rigs • Offshore Platforms




DIMENSIONS

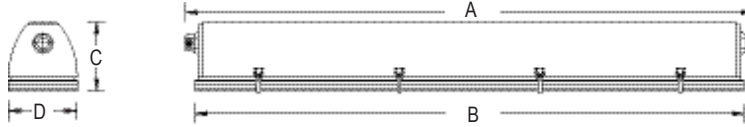

384 Series Dimensions (Inches) (Nominal)						
	A	B	C	D	Weight	Volume
4 Ft.	51.6	50.0	6.3	6.5	32#	1.55 Cu. Ft.
2 Ft.	26.0	26.0	6.3	6.5	23#	.78 Cu. Ft.

MOUNTING

Versatile Mounting arrangements, (360°).
Brackets come standard



Adjustable Mount Bracket Detail