



Photometric Report (Type C)

Filename: HAZ021I.ies

Maximum Candela = 1806 at 0 H 0 V

Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)

Upward Wast Light Ratio: 0.04

Luminaire Efficacy Rating (LER): 7649

Indoor Classification: Direct

BUG Rating : B3-U3-G2


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 0 Vertical

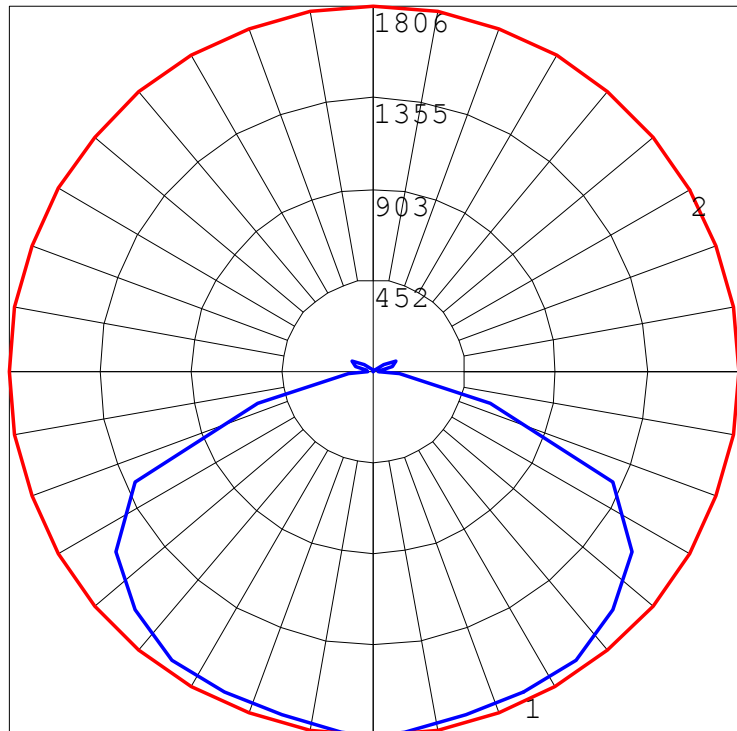

Photometric Report (Type C)

Filename: HAZ021I.ies

Maximum Candela = 1806 at 0 H 0 V

Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)

Upward Waste Light Ratio: 0.04

Luminaire Efficacy Rating (LER): 7649

Indoor Classification: Direct

BUG Rating : B3-U3-G2

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	520.4	5.9	6.8
FM (30-60)	1760.1	20.0	23.0
FH (60-80)	1169.5	13.3	15.3
FVH (80-90)	215.2	2.4	2.8
BL (0-30)	520.4	5.9	6.8
BM (30-60)	1760.1	20.0	23.0
BH (60-80)	1169.5	13.3	15.3
BVH (80-90)	215.2	2.4	2.8
UL (90-100)	17.5	0.2	0.2
UH (100-180)	300.9	3.4	3.9
Total	7648.8	86.8	100.0
BUG Rating	B3-U3-G2		

