



Photometric Report (Type C)

Filename: HAZ027I.ies

Maximum Candela = 1420 at 0 H 45 V

Classification:

Road Classification: Type V, Short, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.34

Luminaire Efficacy Rating (LER): 12719

Indoor Classification: Semi-Direct

BUG Rating : B3-U5-G5


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 45 Vertical

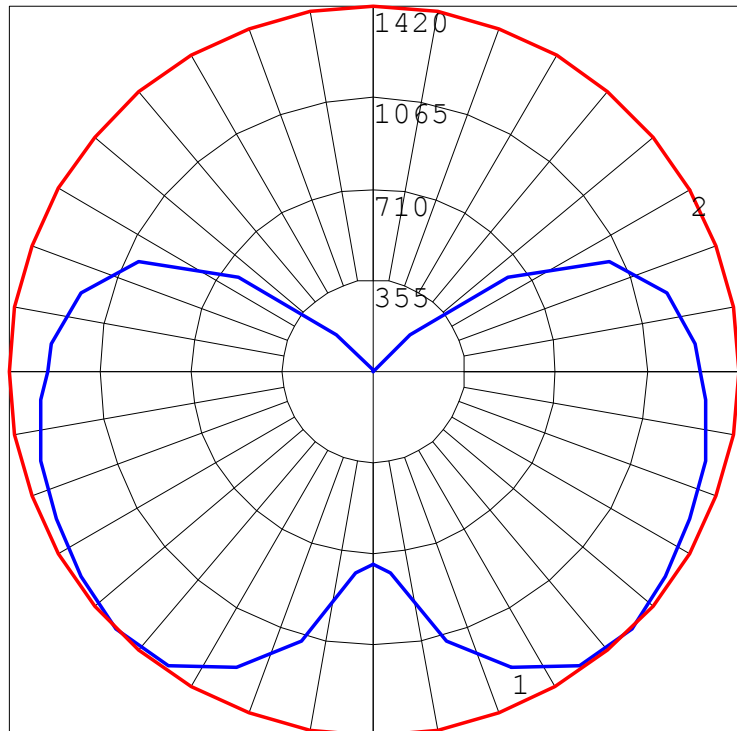



Photometric Report (Type C)

Filename: HAZ027I.ies

Maximum Candela = 1420 at 0 H 45 V

Classification:

Road Classification: Type V, Short, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.34

Luminaire Efficacy Rating (LER): 12719

Indoor Classification: Semi-Direct

BUG Rating : B3-U5-G5

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	319.6	2.3	2.5
FM (30-60)	1451.2	10.4	11.4
FH (60-80)	1346.8	9.6	10.6
FVH (80-90)	1063.7	7.6	8.4
BL (0-30)	319.6	2.3	2.5
BM (30-60)	1451.2	10.4	11.4
BH (60-80)	1346.8	9.6	10.6
BVH (80-90)	1063.7	7.6	8.4
UL (90-100)	692.7	4.9	5.4
UH (100-180)	3663.9	26.2	28.8
Total	12719.2	90.9	100.0
BUG Rating	B3-U5-G5		

