



Photometric Report (Type C)

Filename: HAZ047I.ies

Maximum Candela = 2090 at 0 H 75 V

Classification:

Road Classification: Type V, Long, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.41

Luminaire Efficacy Rating (LER): 18415

Indoor Classification: General Diffuse

BUG Rating : B3-U5-G5


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 75 Vertical

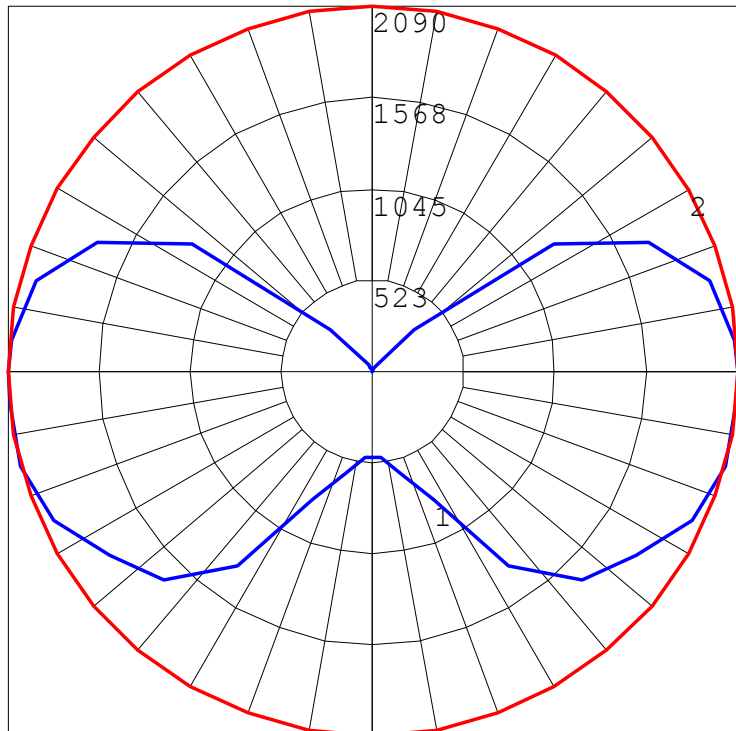



Photometric Report (Type C)

Filename: HAZ047I.ies

Maximum Candela = 2090 at 0 H 75 V

Classification:

Road Classification: Type V, Long, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.41

Luminaire Efficacy Rating (LER): 18415

Indoor Classification: General Diffuse

BUG Rating : B3-U5-G5

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	190.7	0.9	1.0
FM (30-60)	1579.1	7.2	8.6
FH (60-80)	1972.8	9.0	10.7
FVH (80-90)	1699.4	7.7	9.2
BL (0-30)	190.7	0.9	1.0
BM (30-60)	1579.1	7.2	8.6
BH (60-80)	1972.8	9.0	10.7
BVH (80-90)	1699.4	7.7	9.2
UL (90-100)	1141.8	5.2	6.2
UH (100-180)	6389.0	29.0	34.7
Total	18414.8	83.8	100.0
BUG Rating	B3-U5-G5		

