



Photometric Report (Type C)

Filename: HAZ056I.ies

Maximum Candela = 8180 at 0 H 25 V

Classification:

Road Classification: Type V, Very Short, Full Cutoff (deprecated)

Upward Wast Light Ratio: 0.00

Luminaire Efficacy Rating (LER): 12810

Indoor Classification: Direct

BUG Rating : B3-U0-G0


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 25 Vertical

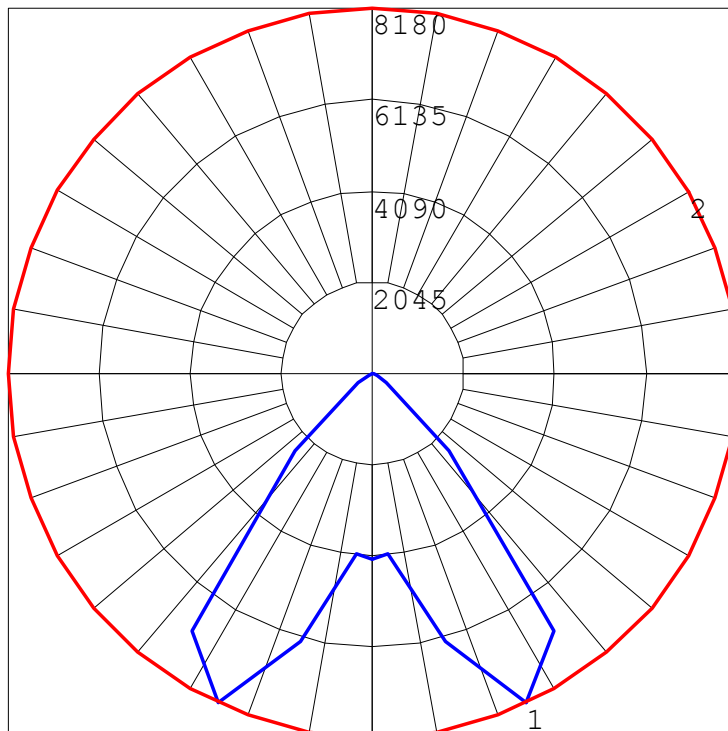



Photometric Report (Type C)

Filename: HAZ056I.ies

Maximum Candela = 8180 at 0 H 25 V

Classification:

Road Classification: Type V, Very Short, Full Cutoff (deprecated)

Upward Waste Light Ratio: 0.00

Luminaire Efficacy Rating (LER): 12810

Indoor Classification: Direct

BUG Rating : B3-U0-G0

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	1891.3	8.6	14.8
FM (30-60)	4356.2	19.8	34.0
FH (60-80)	149.7	0.7	1.2
FVH (80-90)	7.6	0.0	0.1
BL (0-30)	1891.3	8.6	14.8
BM (30-60)	4356.2	19.8	34.0
BH (60-80)	149.7	0.7	1.2
BVH (80-90)	7.6	0.0	0.1
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	12809.6	58.2	100.0
BUG Rating	B3-U0-G0		

