



Photometric Report (Type C)

Filename: HAZ062I.ies

Maximum Candela = 6090 at 0 H 0 V

Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)

Upward Wast Light Ratio: 0.03

Luminaire Efficacy Rating (LER): 26392

Indoor Classification: Direct

BUG Rating : B4-U4-G5


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 0 Vertical

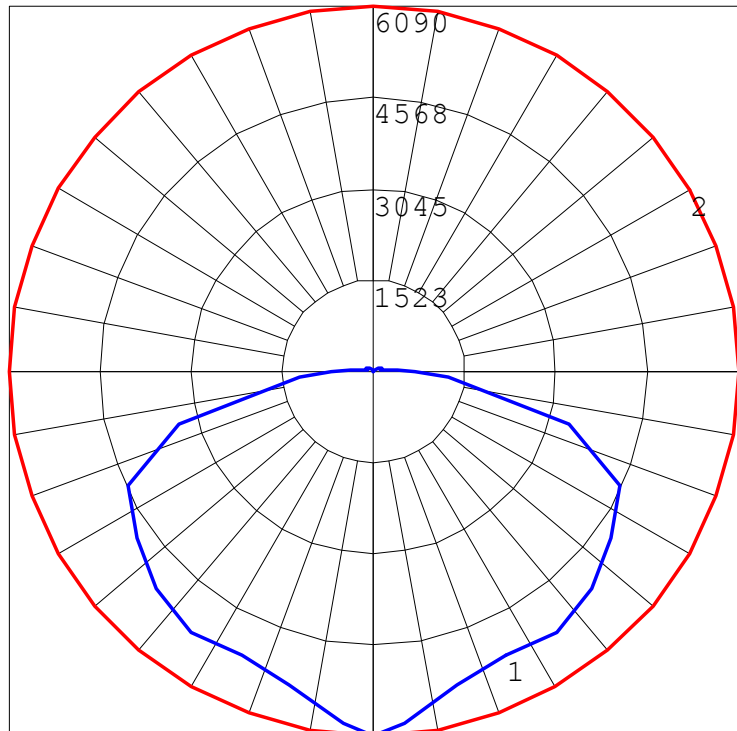



Photometric Report (Type C)

Filename: HAZ062I.ies

Maximum Candela = 6090 at 0 H 0 V

Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)

Upward Waste Light Ratio: 0.03

Luminaire Efficacy Rating (LER): 26392

Indoor Classification: Direct

BUG Rating : B4-U4-G5

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	1607.4	4.7	6.1
FM (30-60)	5384.2	15.8	20.4
FH (60-80)	4262.0	12.5	16.1
FVH (80-90)	1511.6	4.4	5.7
BL (0-30)	1607.4	4.7	6.1
BM (30-60)	5384.2	15.8	20.4
BH (60-80)	4262.0	12.5	16.1
BVH (80-90)	1511.6	4.4	5.7
UL (90-100)	298.7	0.9	1.1
UH (100-180)	562.5	1.7	2.1
Total	26391.6	77.4	100.0
BUG Rating	B4-U4-G5		

