



## Photometric Report (Type C)

Filename: HAZ064I.ies

Maximum Candela = 7800 at 0 H 0 V

### Classification:

Road Classification: Type V, Very Short, Semi-Cutoff (deprecated)

Upward Wast Light Ratio: 0.15

Luminaire Efficacy Rating (LER): 26754

Indoor Classification: Semi-Direct

BUG Rating : B4-U5-G5


### Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 0 Vertical

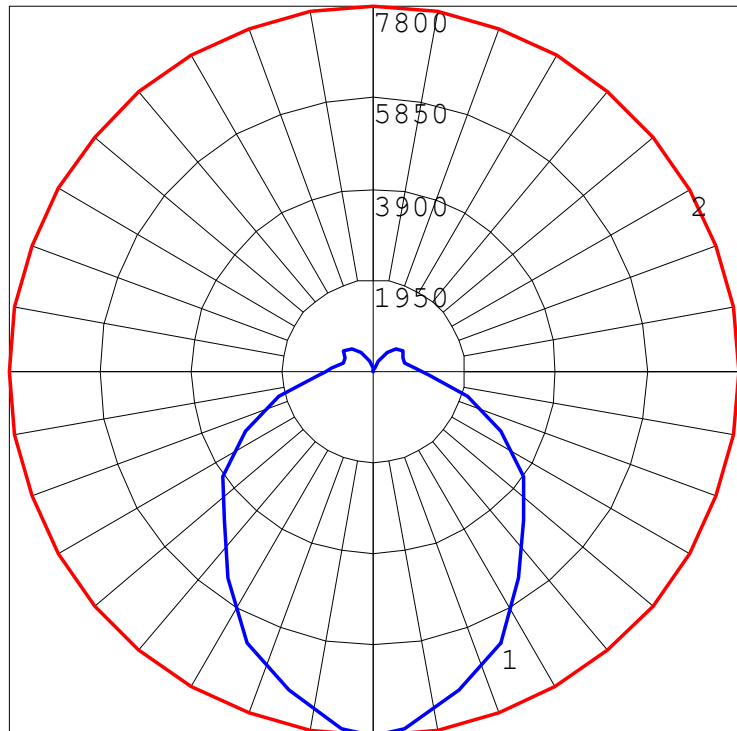



## Photometric Report (Type C)

Filename: HAZ064I.ies

Maximum Candela = 7800 at 0 H 0 V

### Classification:

Road Classification: Type V, Very Short, Semi-Cutoff (deprecated)

Upward Waste Light Ratio: 0.15

Luminaire Efficacy Rating (LER): 26754

Indoor Classification: Semi-Direct

BUG Rating : B4-U5-G5

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	2056.1	6.0	7.7
FM (30-60)	5148.7	15.1	19.2
FH (60-80)	2962.8	8.7	11.1
FVH (80-90)	1187.0	3.5	4.4
BL (0-30)	2056.1	6.0	7.7
BM (30-60)	5148.7	15.1	19.2
BH (60-80)	2962.8	8.7	11.1
BVH (80-90)	1187.0	3.5	4.4
UL (90-100)	526.0	1.5	2.0
UH (100-180)	3518.4	10.3	13.2
Total	26753.6	78.4	100.0
BUG Rating	B4-U5-G5		

