



Photometric Report (Type C)

Filename: HAZ110I.ies

Maximum Candela = 945 at 0 H 65 V

Classification:

Road Classification: Type V, Short, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.20

Luminaire Efficacy Rating (LER): 5928

Indoor Classification: Semi-Direct

BUG Rating : B2-U4-G4


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 65 Vertical

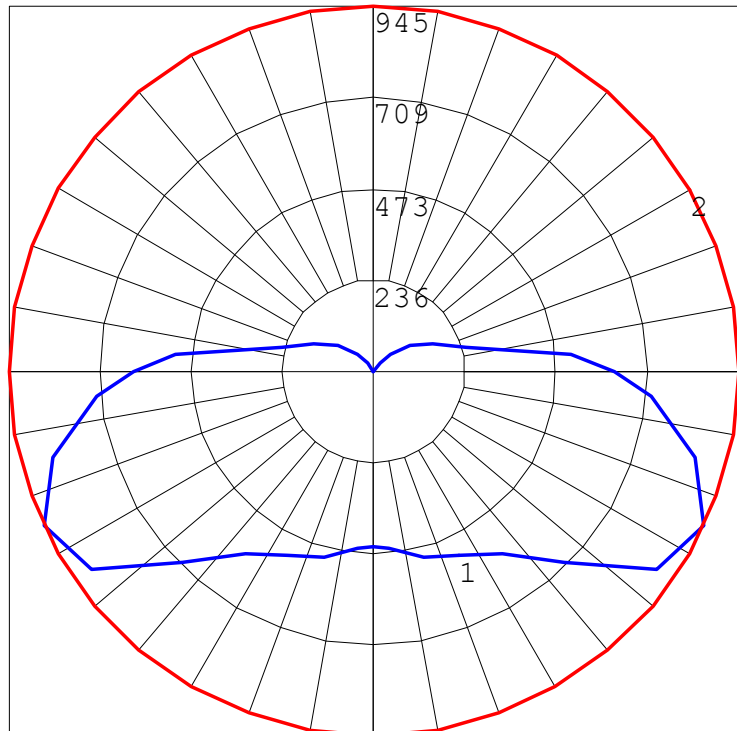



Photometric Report (Type C)

Filename: HAZ110I.ies

Maximum Candela = 945 at 0 H 65 V

Classification:

Road Classification: Type V, Short, Non-Cutoff (deprecated)
 Upward Waste Light Ratio: 0.20
 Luminaire Efficacy Rating (LER): 5928
 Indoor Classification: Semi-Direct
 BUG Rating : B2-U4-G4

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	147.5	1.7	2.5
FM (30-60)	711.4	8.1	12.0
FH (60-80)	901.2	10.2	15.2
FVH (80-90)	611.4	6.9	10.3
BL (0-30)	147.5	1.7	2.5
BM (30-60)	711.4	8.1	12.0
BH (60-80)	901.2	10.2	15.2
BVH (80-90)	611.4	6.9	10.3
UL (90-100)	311.6	3.5	5.3
UH (100-180)	873.2	9.9	14.7
Total	5927.8	67.2	100.0
BUG Rating	B2-U4-G4		

