



## Photometric Report (Type C)

Filename: HAZ4160.ies

Maximum Candela = 1301.92004394531 at 0 H 75 V

### Classification:

Road Classification: Type V, Medium, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.40

Luminaire Efficacy Rating (LER): 12489

Indoor Classification: Semi-Direct

BUG Rating : B3-U5-G5


### Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 75 Vertical

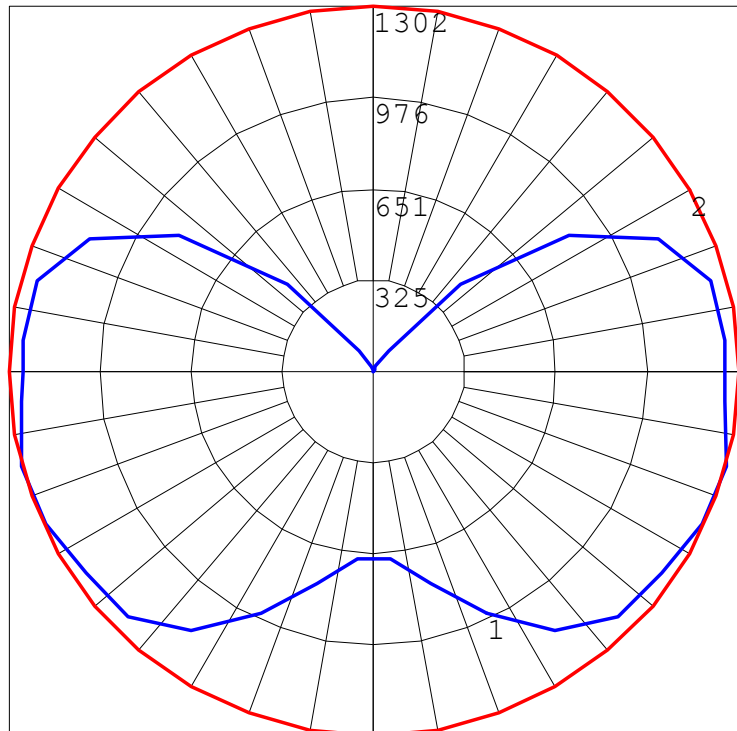



## Photometric Report (Type C)

Filename: HAZ4160.ies

Maximum Candela = 1301.92004394531 at 0 H 75 V

### Classification:

Road Classification: Type V, Medium, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.40

Luminaire Efficacy Rating (LER): 12489

Indoor Classification: Semi-Direct

BUG Rating : B3-U5-G5

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	240.2	1.7	1.9
FM (30-60)	1224.3	8.7	9.8
FH (60-80)	1271.6	9.1	10.2
FVH (80-90)	1035.1	7.4	8.3
BL (0-30)	240.2	1.7	1.9
BM (30-60)	1224.3	8.7	9.8
BH (60-80)	1271.6	9.1	10.2
BVH (80-90)	1035.1	7.4	8.3
UL (90-100)	687.0	4.9	5.5
UH (100-180)	4259.5	30.4	34.1
Total	12488.9	89.1	100.0
BUG Rating	B3-U5-G5		

