



Photometric Report (Type C)

Filename: HAZ4164.ies

Maximum Candela = 2980.69995117188 at 0 H 0 V

Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)

Upward Wast Light Ratio: 0.04

Luminaire Efficacy Rating (LER): 12675

Indoor Classification: Direct

BUG Rating : B3-U3-G5


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 0 Vertical

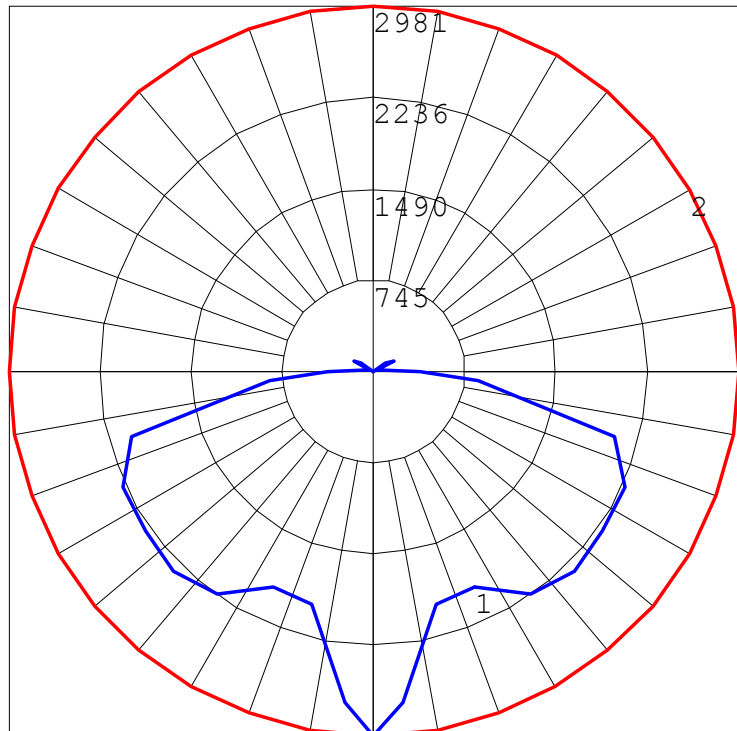



Photometric Report (Type C)

Filename: HAZ4164.ies

Maximum Candela = 2980.69995117188 at 0 H 0 V

Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)

Upward Waste Light Ratio: 0.04

Luminaire Efficacy Rating (LER): 12675

Indoor Classification: Direct

BUG Rating : B3-U3-G5

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	623.7	3.9	4.9
FM (30-60)	2334.7	14.6	18.4
FH (60-80)	2184.8	13.7	17.2
FVH (80-90)	950.9	5.9	7.5
BL (0-30)	623.7	3.9	4.9
BM (30-60)	2334.7	14.6	18.4
BH (60-80)	2184.8	13.7	17.2
BVH (80-90)	950.9	5.9	7.5
UL (90-100)	122.8	0.8	1.0
UH (100-180)	363.8	2.3	2.9
Total	12674.8	79.3	100.0
BUG Rating	B3-U3-G5		

