



## Photometric Report (Type C)

Filename: HAZ201I.ies

Maximum Candela = 407 at 0 H 75 V

### Classification:

Road Classification: Type V, Long, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.39

Luminaire Efficacy Rating (LER): 3205

Indoor Classification: Semi-Direct

BUG Rating : B1-U5-G3


### Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 75 Vertical

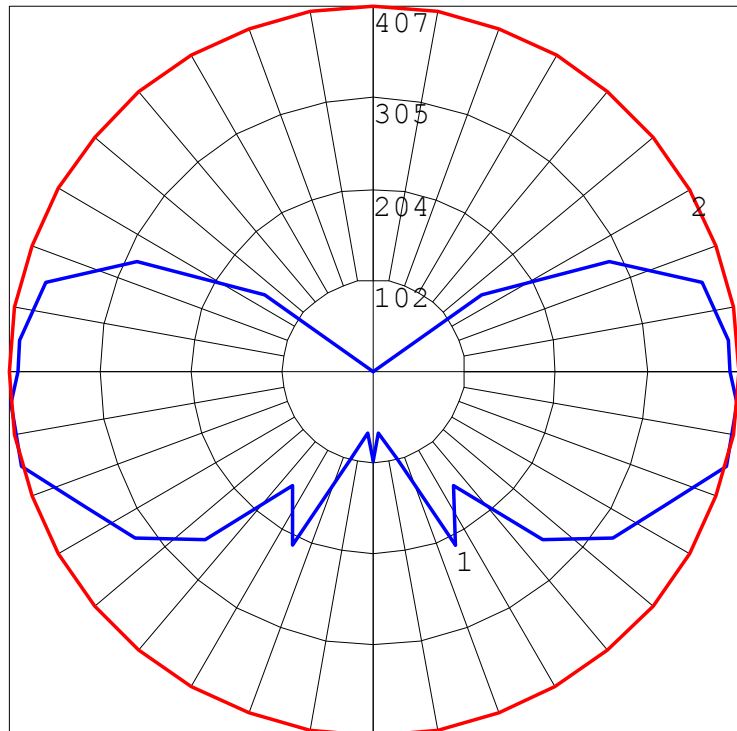



## Photometric Report (Type C)

Filename: HAZ201I.ies

Maximum Candela = 407 at 0 H 75 V

### Classification:

Road Classification: Type V, Long, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.39

Luminaire Efficacy Rating (LER): 3205

Indoor Classification: Semi-Direct

BUG Rating : B1-U5-G3

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	38.7	1.0	1.2
FM (30-60)	249.9	6.2	7.8
FH (60-80)	358.5	9.0	11.2
FVH (80-90)	329.7	8.2	10.3
BL (0-30)	38.7	1.0	1.2
BM (30-60)	249.9	6.2	7.8
BH (60-80)	358.5	9.0	11.2
BVH (80-90)	329.7	8.2	10.3
UL (90-100)	217.7	5.4	6.8
UH (100-180)	1033.6	25.8	32.2
Total	3204.9	80.0	100.0
BUG Rating	B1-U5-G3		

