



Photometric Report (Type C)

Filename: HAZ211I.ies

Maximum Candela = 693 at 0 H 25 V

Classification:

Road Classification: Type V, Very Short, Full Cutoff (deprecated)

Upward Wast Light Ratio: 0.00

Luminaire Efficacy Rating (LER): 2865

Indoor Classification: Direct

BUG Rating : B2-U0-G1


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 25 Vertical

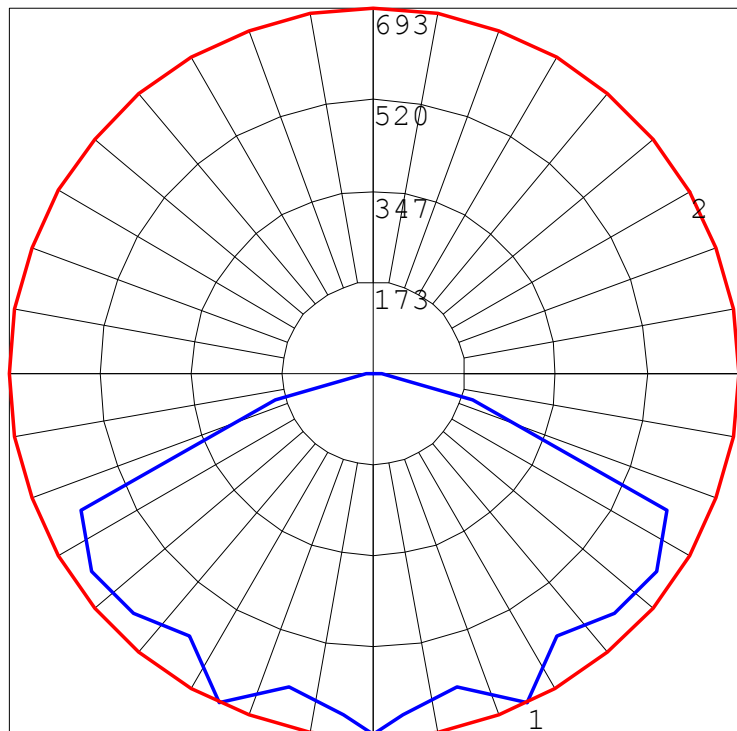



Photometric Report (Type C)

Filename: HAZ211I.ies

Maximum Candela = 693 at 0 H 25 V

Classification:

Road Classification: Type V, Very Short, Full Cutoff (deprecated)
 Upward Waste Light Ratio: 0.00
 Luminaire Efficacy Rating (LER): 2865
 Indoor Classification: Direct
 BUG Rating : B2-U0-G1

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	191.2	4.8	6.7
FM (30-60)	672.2	16.8	23.5
FH (60-80)	509.8	12.7	17.8
FVH (80-90)	59.1	1.5	2.1
BL (0-30)	191.2	4.8	6.7
BM (30-60)	672.2	16.8	23.5
BH (60-80)	509.8	12.7	17.8
BVH (80-90)	59.1	1.5	2.1
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	2864.6	71.6	100.0
BUG Rating	B2-U0-G1		

