



Photometric Report (Type C)

Filename: HAZ231I.ies

Maximum Candela = 1366 at 75 H 65 V

Classification:

Road Classification: Type II, Short, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.21

Luminaire Efficacy Rating (LER): 2979

Indoor Classification: Semi-Direct

BUG Rating : B1-U4-G3


Polar Candela Curves:

Vertical Plane Through:

1) 75 - 255 Horizontal

Horizontal Cone Through:

2) 65 Vertical

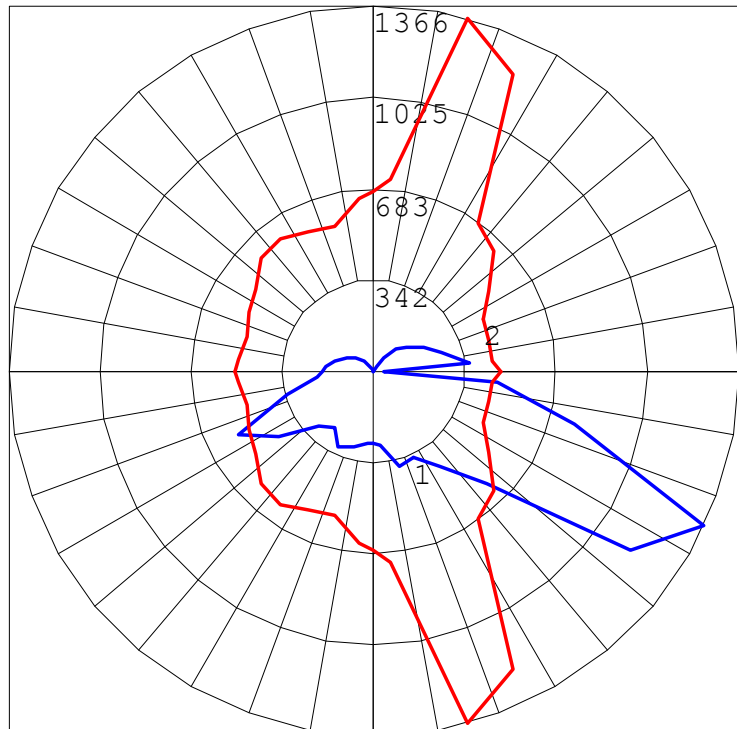



Photometric Report (Type C)

Filename: HAZ231I.ies

Maximum Candela = 1366 at 75 H 65 V

Classification:

Road Classification: Type II, Short, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.21

Luminaire Efficacy Rating (LER): 2979

Indoor Classification: Semi-Direct

BUG Rating : B1-U4-G3

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	89.1	2.2	3.0
FM (30-60)	382.7	9.6	12.8
FH (60-80)	602.1	15.1	20.2
FVH (80-90)	243.1	6.1	8.2
BL (0-30)	75.7	1.9	2.5
BM (30-60)	297.6	7.4	10.0
BH (60-80)	460.1	11.5	15.4
BVH (80-90)	202.7	5.1	6.8
UL (90-100)	99.6	2.5	3.3
UH (100-180)	525.8	13.1	17.7
Total	2978.5	74.5	100.0
BUG Rating	B1-U4-G3		

