



## Photometric Report (Type C)

Filename: HAZ274I.ies

Maximum Candela = 140 at 0 H 75 V

### Classification:

Road Classification: Type V, Long, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.36

Luminaire Efficacy Rating (LER): 1108

Indoor Classification: Semi-Direct

BUG Rating : B1-U3-G2


### Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 75 Vertical

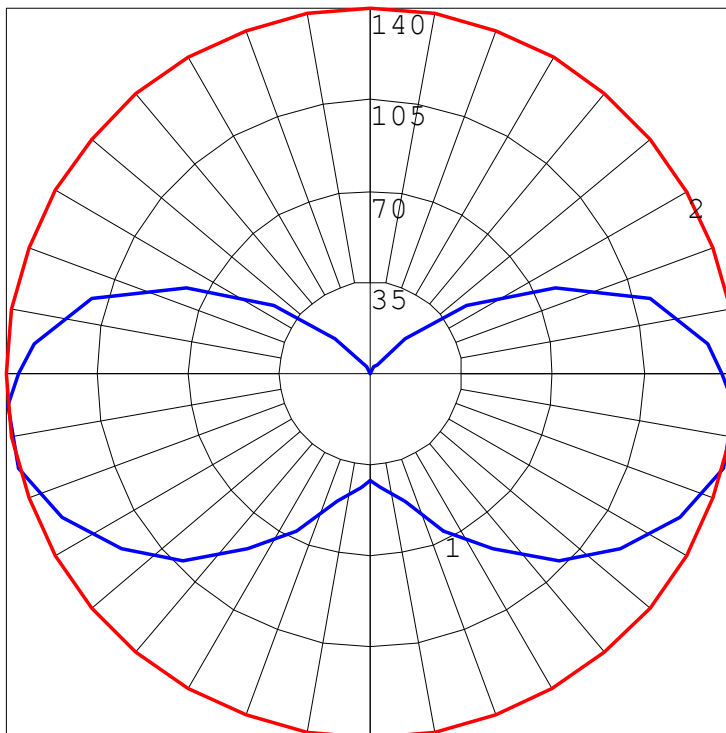



## Photometric Report (Type C)

Filename: HAZ274I.ies

Maximum Candela = 140 at 0 H 75 V

### Classification:

Road Classification: Type V, Long, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.36

Luminaire Efficacy Rating (LER): 1108

Indoor Classification: Semi-Direct

BUG Rating : B1-U3-G2

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	16.1	2.7	1.5
FM (30-60)	98.7	16.5	8.9
FH (60-80)	128.5	21.4	11.6
FVH (80-90)	113.2	18.9	10.2
BL (0-30)	16.1	2.7	1.5
BM (30-60)	98.7	16.5	8.9
BH (60-80)	128.5	21.4	11.6
BVH (80-90)	113.2	18.9	10.2
UL (90-100)	72.6	12.1	6.5
UH (100-180)	323.0	53.8	29.1
Total	1108.6	184.9	100.0
BUG Rating	B1-U3-G2		

