



Photometric Report (Type C)

Filename: HAZ279I.ies

Maximum Candela = 180 at 0 H 75 V

Classification:

Road Classification: Type V, Medium, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.32

Luminaire Efficacy Rating (LER): 1381

Indoor Classification: Semi-Direct

BUG Rating : B1-U3-G2


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 75 Vertical

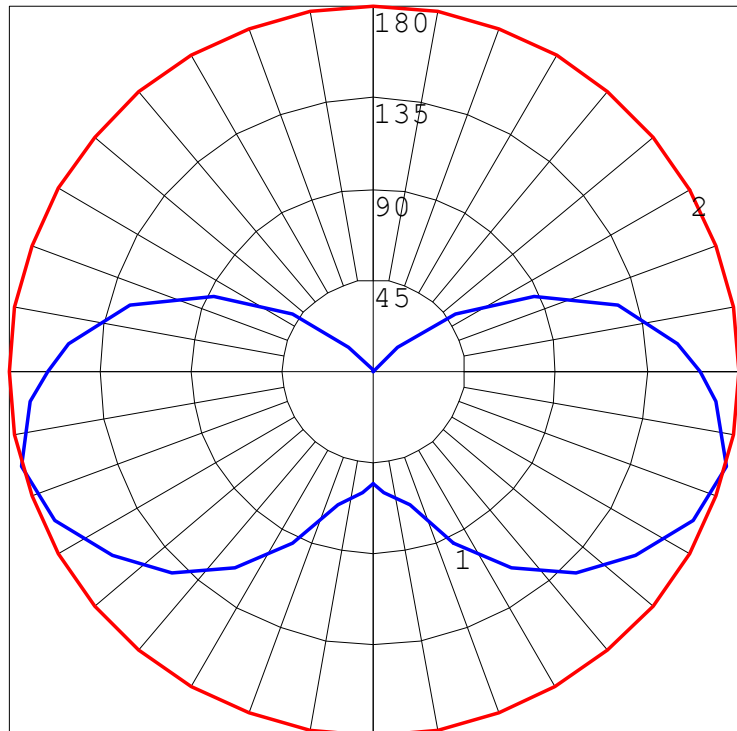



Photometric Report (Type C)

Filename: HAZ279I.ies

Maximum Candela = 180 at 0 H 75 V

Classification:

Road Classification: Type V, Medium, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.32

Luminaire Efficacy Rating (LER): 1381

Indoor Classification: Semi-Direct

BUG Rating : B1-U3-G2

LCS Summary:

| LCS Zone | Lumens | %Lamp | %Lum |
|--------------|----------|-------|-------|
| FL (0-30) | 22.0 | 2.4 | 1.6 |
| FM (30-60) | 137.6 | 15.3 | 10.0 |
| FH (60-80) | 169.8 | 18.9 | 12.3 |
| FVH (80-90) | 139.7 | 15.5 | 10.1 |
| BL (0-30) | 22.0 | 2.4 | 1.6 |
| BM (30-60) | 137.6 | 15.3 | 10.0 |
| BH (60-80) | 169.8 | 18.9 | 12.3 |
| BVH (80-90) | 139.7 | 15.5 | 10.1 |
| UL (90-100) | 85.4 | 9.5 | 6.2 |
| UH (100-180) | 357.8 | 39.8 | 25.9 |
| Total | 1381.4 | 153.5 | 100.0 |
| BUG Rating | B1-U3-G2 | | |

