



Photometric Report (Type C)

Filename: HAZ308I.ies

Maximum Candela = 193 at 0 H 45 V

Classification:

Road Classification: Type V, Short, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.28

Luminaire Efficacy Rating (LER): 1516

Indoor Classification: Semi-Direct

BUG Rating : B1-U3-G2


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 45 Vertical

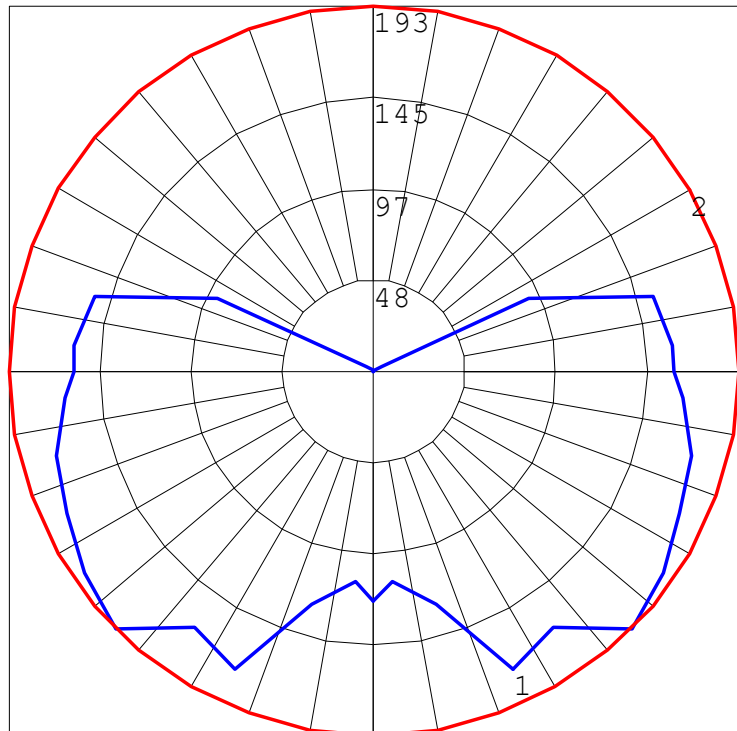



Photometric Report (Type C)

Filename: HAZ308I.ies

Maximum Candela = 193 at 0 H 45 V

Classification:

Road Classification: Type V, Short, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.28

Luminaire Efficacy Rating (LER): 1516

Indoor Classification: Semi-Direct

BUG Rating : B1-U3-G2

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	41.1	2.3	2.7
FM (30-60)	189.4	10.8	12.5
FH (60-80)	177.6	10.1	11.7
FVH (80-90)	135.4	7.7	8.9
BL (0-30)	41.1	2.3	2.7
BM (30-60)	189.4	10.8	12.5
BH (60-80)	177.6	10.1	11.7
BVH (80-90)	135.4	7.7	8.9
UL (90-100)	87.1	5.0	5.7
UH (100-180)	342.2	19.6	22.6
Total	1516.3	86.4	100.0
BUG Rating	B1-U3-G2		

