



Photometric Report (Type C)

Filename: HAZ075I.ies

Maximum Candela = 1080 at 0 H 65 V

Classification:

Road Classification: Type V, Short, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.20

Luminaire Efficacy Rating (LER): 7162

Indoor Classification: Semi-Direct

BUG Rating : B3-U4-G5


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 65 Vertical

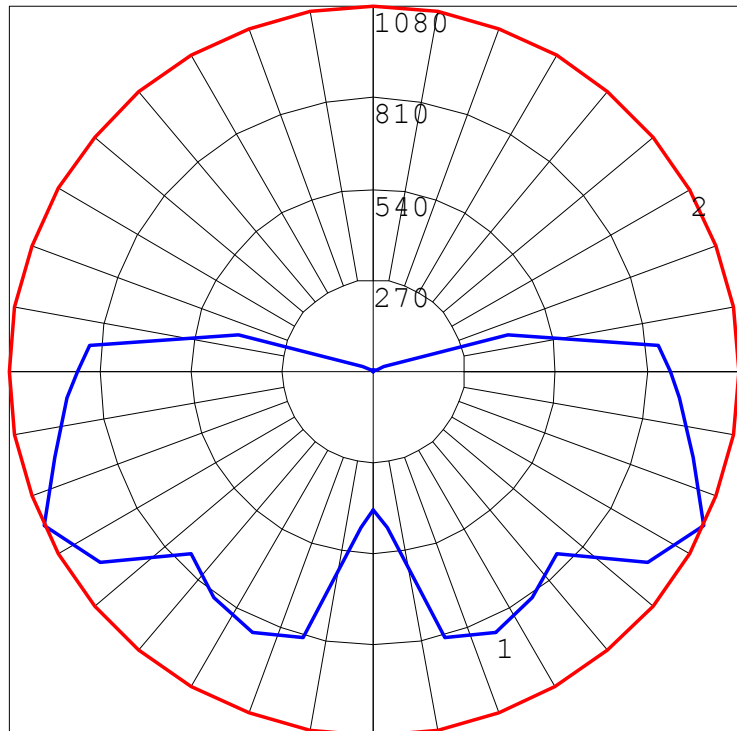



Photometric Report (Type C)

Filename: HAZ075I.ies

Maximum Candela = 1080 at 0 H 65 V

Classification:

Road Classification: Type V, Short, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.20

Luminaire Efficacy Rating (LER): 7162

Indoor Classification: Semi-Direct

BUG Rating : B3-U4-G5

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	222.7	2.3	3.1
FM (30-60)	877.8	9.2	12.3
FH (60-80)	1020.9	10.7	14.3
FVH (80-90)	755.4	8.0	10.5
BL (0-30)	222.7	2.3	3.1
BM (30-60)	877.8	9.2	12.3
BH (60-80)	1020.9	10.7	14.3
BVH (80-90)	755.4	8.0	10.5
UL (90-100)	472.0	5.0	6.6
UH (100-180)	936.9	9.9	13.1
Total	7162.5	75.3	100.0
BUG Rating	B3-U4-G5		

