



Photometric Report (Type C)

Filename: HAZ080I.ies

Maximum Candela = 1700 at 0 H 25 V

Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)

Upward Wast Light Ratio: 0.04

Luminaire Efficacy Rating (LER): 6254

Indoor Classification: Direct

BUG Rating : B2-U3-G2


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 25 Vertical

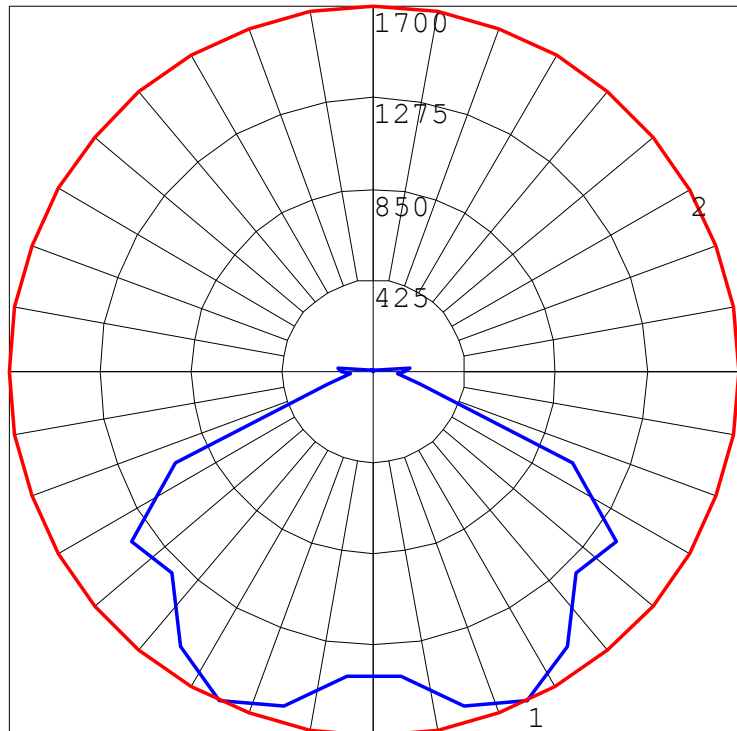



Photometric Report (Type C)

Filename: HAZ080I.ies

Maximum Candela = 1700 at 0 H 25 V

Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)

Upward Waste Light Ratio: 0.04

Luminaire Efficacy Rating (LER): 6254

Indoor Classification: Direct

BUG Rating : B2-U3-G2

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	473.0	5.0	7.6
FM (30-60)	1526.5	16.1	24.4
FH (60-80)	888.9	9.4	14.2
FVH (80-90)	125.7	1.3	2.0
BL (0-30)	473.0	5.0	7.6
BM (30-60)	1526.5	16.1	24.4
BH (60-80)	888.9	9.4	14.2
BVH (80-90)	125.7	1.3	2.0
UL (90-100)	85.7	0.9	1.4
UH (100-180)	139.8	1.5	2.2
Total	6253.7	66.0	100.0
BUG Rating	B2-U3-G2		

