



Photometric Report (Type C)

Filename: HAZ085I.ies

Maximum Candela = 1480 at 0 H 65 V

Classification:

Road Classification: Type V, Short, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.17

Luminaire Efficacy Rating (LER): 9368

Indoor Classification: Semi-Direct

BUG Rating : B3-U4-G5


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 65 Vertical

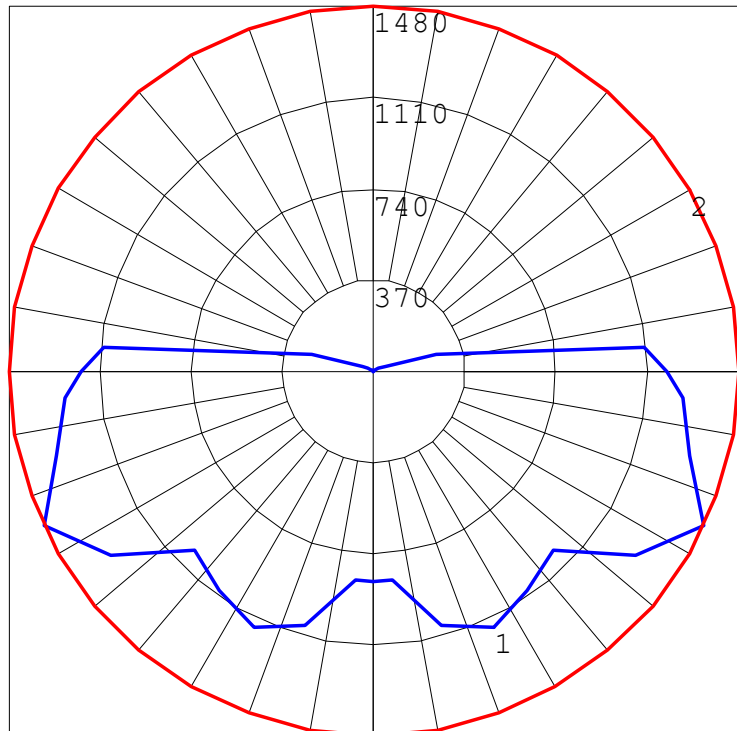



Photometric Report (Type C)

Filename: HAZ085I.ies

Maximum Candela = 1480 at 0 H 65 V

Classification:

Road Classification: Type V, Short, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.17

Luminaire Efficacy Rating (LER): 9368

Indoor Classification: Semi-Direct

BUG Rating : B3-U4-G5

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	309.4	2.2	3.3
FM (30-60)	1168.5	8.3	12.5
FH (60-80)	1382.2	9.9	14.8
FVH (80-90)	1033.8	7.4	11.0
BL (0-30)	309.4	2.2	3.3
BM (30-60)	1168.5	8.3	12.5
BH (60-80)	1382.2	9.9	14.8
BVH (80-90)	1033.8	7.4	11.0
UL (90-100)	627.0	4.5	6.7
UH (100-180)	952.9	6.8	10.2
Total	9367.7	66.9	100.0
BUG Rating	B3-U4-G5		

