



## Photometric Report (Type C)

Filename: HAZ087I.ies

Maximum Candela = 2370 at 0 H 25 V


### Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)  
Upward Wast Light Ratio: 0.00  
Luminaire Efficacy Rating (LER): 8264  
Indoor Classification: Direct  
BUG Rating : B3-U2-G2

### Polar Candela Curves:

Vertical Plane Through:  
1) 0 - 180 Horizontal

Horizontal Cone Through:  
2) 25 Vertical

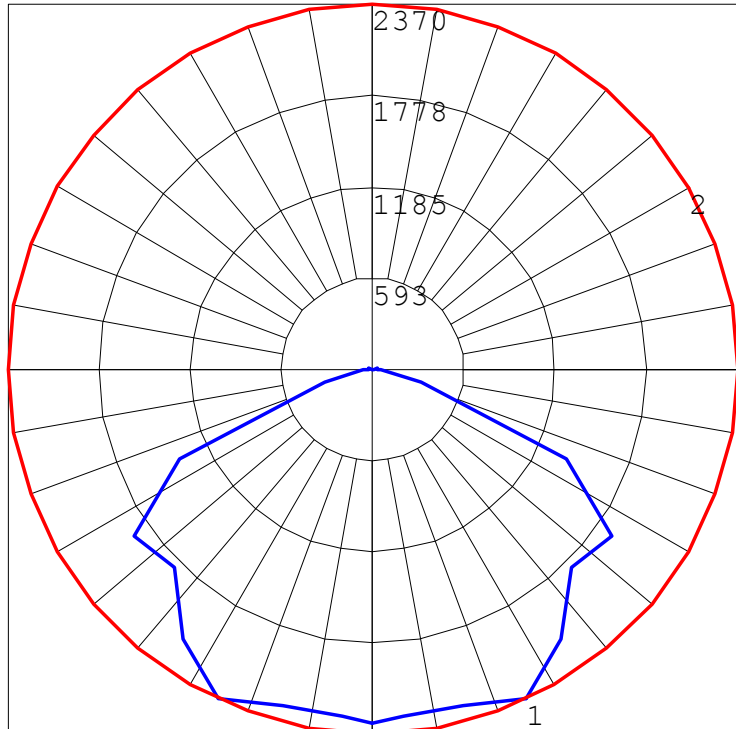



## Photometric Report (Type C)

Filename: HAZ087I.ies

Maximum Candela = 2370 at 0 H 25 V

### Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)

Upward Waste Light Ratio: 0.00

Luminaire Efficacy Rating (LER): 8264

Indoor Classification: Direct

BUG Rating : B3-U2-G2

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	677.7	4.8	8.2
FM (30-60)	2098.5	15.0	25.4
FH (60-80)	1221.7	8.7	14.8
FVH (80-90)	115.9	0.8	1.4
BL (0-30)	677.7	4.8	8.2
BM (30-60)	2098.5	15.0	25.4
BH (60-80)	1221.7	8.7	14.8
BVH (80-90)	115.9	0.8	1.4
UL (90-100)	15.9	0.1	0.2
UH (100-180)	20.9	0.1	0.3
Total	8264.4	58.8	100.0
BUG Rating	B3-U2-G2		

