



## Photometric Report (Type C)

Filename: HAZ351I.ies

Maximum Candela = 4709 at 0 H 5 V

### Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)

Upward Wast Light Ratio: 0.08

Luminaire Efficacy Rating (LER): 25020

Indoor Classification: Direct

BUG Rating : B4-U5-G5


### Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 5 Vertical

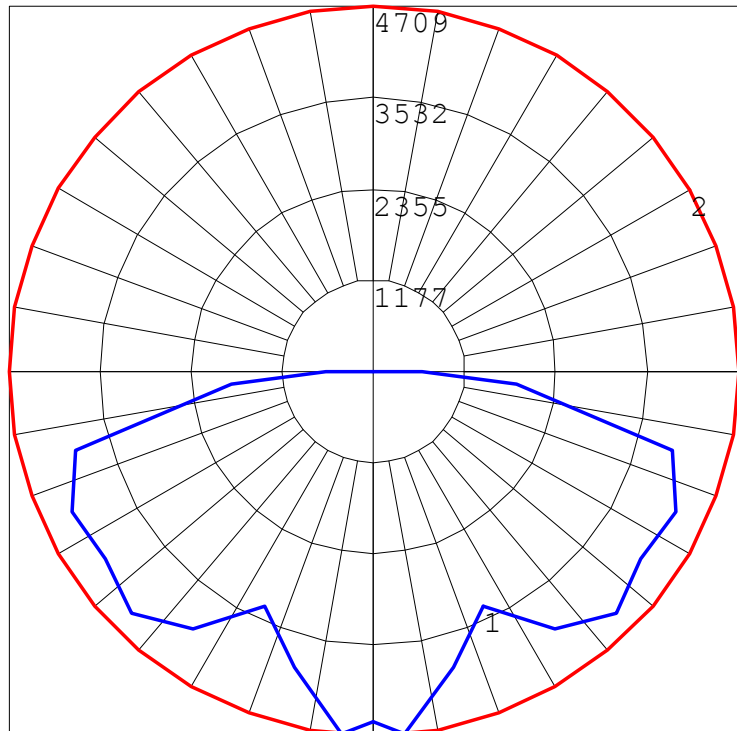



## Photometric Report (Type C)

Filename: HAZ351I.ies

Maximum Candela = 4709 at 0 H 5 V

### Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)

Upward Waste Light Ratio: 0.08

Luminaire Efficacy Rating (LER): 25020

Indoor Classification: Direct

BUG Rating : B4-U5-G5

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	1152.9	3.8	4.6
FM (30-60)	4323.8	14.4	17.3
FH (60-80)	4150.5	13.8	16.6
FVH (80-90)	1912.1	6.4	7.6
BL (0-30)	1152.9	3.8	4.6
BM (30-60)	4323.8	14.4	17.3
BH (60-80)	4150.5	13.8	16.6
BVH (80-90)	1912.1	6.4	7.6
UL (90-100)	0.0	0.0	0.0
UH (100-180)	1941.5	6.5	7.8
Total	25020.1	83.3	100.0
BUG Rating	B4-U5-G5		

