



Photometric Report (Type C)

Filename: HAZ365I.ies

Maximum Candela = 3261 at 0 H 85 V

Classification:

Road Classification: Type V, Long, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.42

Luminaire Efficacy Rating (LER): 27341

Indoor Classification: General Diffuse

BUG Rating : B4-U5-G5


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 85 Vertical

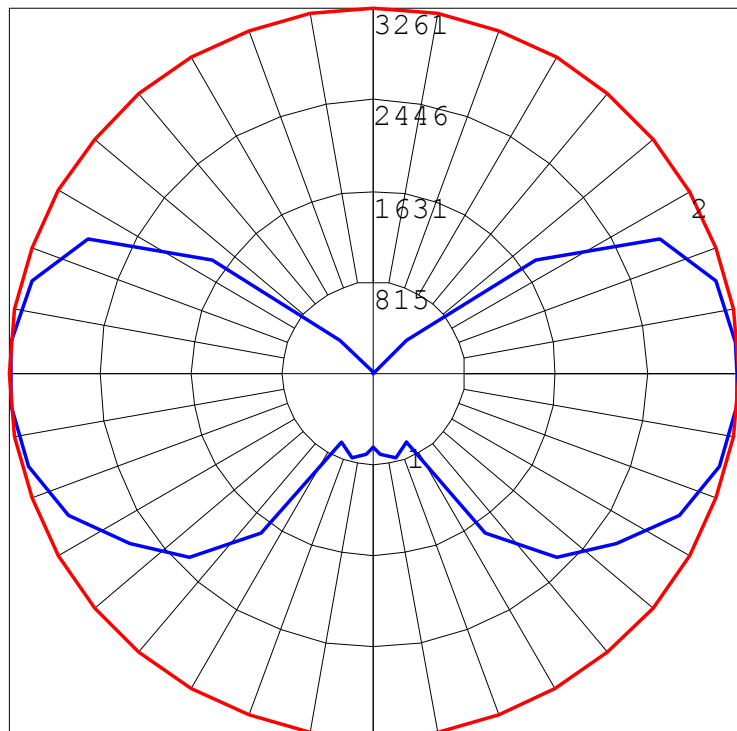



Photometric Report (Type C)

Filename: HAZ365I.ies

Maximum Candela = 3261 at 0 H 85 V

Classification:

Road Classification: Type V, Long, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.42

Luminaire Efficacy Rating (LER): 27341

Indoor Classification: General Diffuse

BUG Rating : B4-U5-G5

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	216.2	0.7	0.8
FM (30-60)	2093.2	7.0	7.7
FH (60-80)	2942.9	9.8	10.8
FVH (80-90)	2632.5	8.8	9.6
BL (0-30)	216.2	0.7	0.8
BM (30-60)	2093.2	7.0	7.7
BH (60-80)	2942.9	9.8	10.8
BVH (80-90)	2632.5	8.8	9.6
UL (90-100)	1778.4	5.9	6.5
UH (100-180)	9793.1	32.6	35.8
Total	27341.1	91.1	100.0
BUG Rating	B4-U5-G5		

