



# LE203

## LED WET / DAMP LIGHTING

Food & Beverage Processing • Industrial • Pulp & Paper • Shipyards / Marine • Water Treatment

Suitable for interior or exterior applications. This LED, lightweight, vapor tight, nonmetallic fixture is ideal for corrosive or wet/damp environments. The LE203 fixture features a fiberglass housing with an acrylic frosted or acrylic frosted ribbed lens, a continuous poured in place gasket design, and comes standard with surface mount brackets. The LE203 is ideal for commercial industrial or institutional applications providing maximum light output where humidity, dust, or fumes are possible. The LE203 is resilient against corrosion and weathering and is available in 2', 4', and 8' fixture lengths.



1 SERIES	2 LUMENS	3 CCT	4 VOLTAGE
LE203	38: 37W (4000Lm*) (2 Ft.) 77: 73W (8000Lm*) (4 Ft.) 154: 145W (16000Lm*) (8 Ft.) *Nominal Lumens	3: 3500K 4: 4000K 5: 5000K	V1: 120-277V
5 LENGTH	6 LENS	7 MOUNT	8 OPTIONS
2: 2 Ft. 4: 4 Ft. 8: 8 Ft.	ARF: Acrylic Ribbed Frosted Lens AF: Acrylic Frosted Lens ASF: Acrylic Shallow Frosted Lens (4 & 8 Ft. only)	SM: Surface Mount Bracket AM: 45° Angle Mount	SL: Stainless Steel Latches

### CERTIFICATIONS

UL 1598A  
CSA 22.2 No. 250.0  
UL 8750  
CSA 22.2 No. 250.13  
NEMA 4X  
NSF (enclosure only)  
High Pressure Tested at 1500psi  
-20°C to 35°C Ambient Rating  
IP67 - Housing Only  
DLC

### FEATURES

Fiberglass: 5VA UL rated  
5 Year Warranty  
>50,000 hours

### PERFORMANCE

2 Ft.: 37 watts (4000 Lumens)  
4 Ft.: 73 watts (8000 Lumens)  
8 Ft.: 145 watts (16000 Lumens)  
120-277 VAC, 50/60Hz  
0-10V Dimming (Standard)

### OPTICS


Acrylic Ribbed Frosted Lens  
Acrylic Frosted Lens  
Acrylic Shallow Frosted Lens

### OPTIONS

45° Angle Mount Bracket  
Stainless Steel Latches

### NOTES

For chemical resistance information please see website

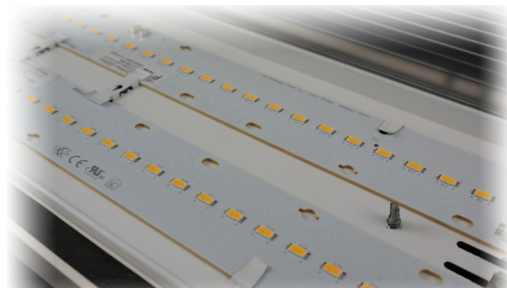


# LE203

## LED WET / DAMP LIGHTING



Food & Beverage Processing • Industrial • Pulp & Paper • Shipyards / Marine • Water Treatment



### DIMENSIONS




Acrylic ribbed frosted lens depth: 2.13"  
 Acrylic frosted lens depth: 3.5"  
 Acrylic shallow frosted lens depth: 2.03"




PART #	A	B	C	D
LE203-38	27.25"	4.25"	6.75"	7.33"
LE203-77	51.75"	4.25"	6.75"	7.33"
LE203-154	100.19"	4.25"	6.75"	7.33"

"B" measurement: with acrylic ribbed frosted lens is 4.25"  
 "B" measurement with acrylic frosted lens is 5.75"  
 "B" measurement with acrylic shallow frosted lens is 4"



Std. Latch Detail





### MOUNTING

- Offers a huge advantage over more traditional enclosures.
- Durable, stainless steel Mounting hardware.
- No drilling necessary for the housing for installation.
- Installation time is dramatically reduced, providing lower installation costs.

#### STANDARD Mounting BRACKET Kits

Included with each fixture

P/N 6686: Two brackets per kit. 1 kit needed per fixture.




Standard Mounting bracket

#### OPTIONAL Mounting

45° Mounting bracket kit

P/N 5102 - Kit includes:

- (2) 45° brackets
- (2) 5081 brackets

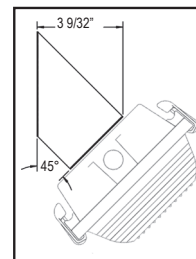

45° Mounting option