

The LE182 Series is a hinged, rear access, recessed mount LED luminaire. The LE182 is made of a combination of 20 Ga. cold rolled steel and .090 aluminum. It is available in a 4 Ft. length with 1, 2, and 3 rows of LEDs. This fixture can be used with or without optics, has dimming capabilities, and is available with an EM option.



LE182		V1				
1	2	3	4	5	6	7

1 SERIES	2 POWER	3 VOLTAGE	4 OPTIC
<b>LE182</b>	<b>58:</b> 58W (6985Lm) 1 Row <b>73:</b> 73W (8700Lm) 1 Row <b>115:</b> 115W (13970Lm) 2 Rows <b>145:</b> 145W (17400Lm) 2 Rows <b>172:</b> 172W (20955Lm) 3 Rows <b>218:</b> 218W (26100Lm) 3 Rows	<b>V1:</b> 120-277V 50/60Hz	<b>BLANK:</b> None <b>A:</b> Diffused Acrylic
5 DIMMING	6 CCT	7 ADD-ON OPTIONS	
<b>Blank:</b> None <b>D1:</b> 0-10V (Additional Hub Required)	<b>3:</b> 3500K <b>4:</b> 4000K <b>5:</b> 5000K	<b>SP:</b> Surge Protector <b>EM:</b> Battery/Driver Backup (90 Min.) <b>PG:</b> Prismatic Glass <b>CP1:</b> Cord 6Ft 120V Twist Lock <b>CP2:</b> Cord 6Ft 277V Twist Lock <b>CP3:</b> Cord 6Ft 120V Straight Blade	

### CERTIFICATIONS

UL 1598 Wet/Damp  
 CSA 22.2 No. 137.0, No. 250.0, No. 250.13  
 -30°C to 55°C Ambient Rating, internal thermal protection

### CONSTRUCTION

20 Gauge Steel Powder Coated White Housing  
 Hinged, Rear Access Panel  
 4 Ft. Length  
 Clear Tempered Glass Lens  
 3 Wire Whip (8') Standard

### PERFORMANCE

58W - 218W (5600Lm - 26000Lm)  
 CCT: 3500 - 5000K  
 CRI >80

### OPTIONS

Surge Protection  
 Emergency Driver  
 Dimming 0-10V

\*These products are Manufactured in the USA with both domestic and imported components; not all fixture configurations are compliant. Contact LDPI Sales with specific part number and requirement - Build America, Buy America, TAA or any other federal procurement act for compliance confirmation. Compliance confirmation can take up to 3 days.



# LE182

## GENERAL LED INDUSTRIAL LIGHTING

Clean Room





### PERFORMANCE

Type	Model	Input Voltage (VAC)	Input Current (A)	Wattage (W)	OPTIC	
					Blank: None Nominal Lumen Output @ 5000K*	A: Diffused Acrylic Nominal Lumen Output at 5000K*
4 Ft. 1 Row	LE182-58	120-277V	0.49 - 0.22	58	6985	5640
	LE182-73		0.61 - 0.28	73	8700	7025
4 Ft. 2 Rows	LE182-115		0.97 - 0.44	115	13970	11280
	LE182-145		1.22 - 0.55	145	17400	14050
4 Ft. 3 Rows	LE182-172		1.45 - 0.65	172	20955	16920
	LE182-218		1.84 - 0.83	218	26100	21075

\* Lumen values shown are nominal.

Emergency Lumen Output	
Diffused Lens	2150
No Lens	2470

### DIMENSIONS

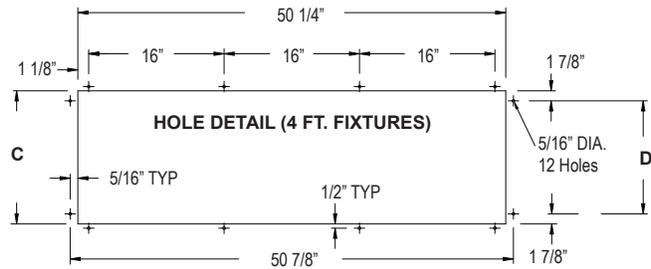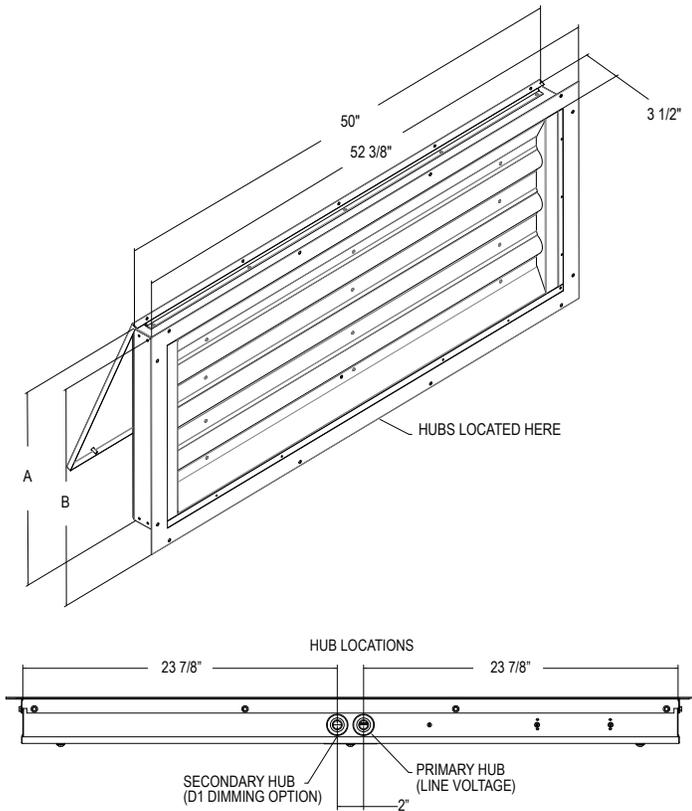

Type	Model	A	B	C	D
4 Ft. 1 Row	LE182-58	10 1/2"	12 1/2"	10 3/4"	7"
	LE182-73				
4 Ft. 2 Rows	LE182-115	15 1/2"	17 1/2"	15 3/4"	12"
	LE182-145				
4 Ft. 3 Rows	LE182-172	20 1/2"	22 1/2"	20 3/4"	17"
	LE182-218				

Note:  
Secondary hub for dimming option only.  
Consult factory for other hub locations