



LED DOCK LIGHTS/ARMS

MODULAR LOADING DOCK & TASK LIGHTING

Trailer/Cargo Docks • Manufacturing Areas • Work Stations • Maintenance Pits

Modular Dock Lights / Modular Arms

The Modular Dock Light features an **Incandescent or LED** fixture head with separate swing arms available with 24in. to 60in. effective reach. Durable, compact design, wear resistant cord and easy-to-mount plate affords a quick installation and long life. Built to endure accidental impact.



Modular Heads					
Type	Item #	Housing	Source	CCT	Voltage
LED	DL-LED-LH (Lamp not included)	Round, high temperature polymer	18W, PAR 38 LED lamp Spring-loaded socket assembly		120VAC (60Hz)
	DL-LED-LH-LMP (Lamp Included)	Round, high temperature polymer	18W, PAR 38 LED lamp Spring-loaded socket assembly		120VAC (60Hz)
	DLA2-12LED	Cast aluminum housing	9W / 1,200Lm 25° Square Beam Angle	4,000K	120VAC (60Hz)

Accessories - Modular Heads (Order separately, field installed)

Item #	Description	
PG-1		Guard - Polycarbonate (DL-INC-LH only)
WG-S		Wire guard (DL-INC-LH only)

DLA2 Options

Item #	Description	Notes
DLA2-12LED-PLG	22" cord w/ 120V, 60Hz NEMA 5-15 plug	1. Not suitable for wet environments 2. Cannot be used with arm assemblies (#DL)
DLA2-12LED-SW	Push button switch on head	1. Not required if purchasing arm assemblies since switch is on arm.

Modular Arms (Order separately, field installed)

Item #	Description	Arm Length (effective reach)
DLSD-40-ARM-DS	Double strut arm for modular heads	40in.
DLSD-60-ARM-DS		60in.

DLA2-12LED

CERTIFICATIONS

ETL/cETL
CSA-C22.2 No.250-08 (Wet Locations)
Lumen Maintenance (L70) >50,000 hrs. (reported)
-40°C to 50°C Ambient
IK10
CE

CONSTRUCTION

Cast aluminum housing
Impact resistant clear polycarbonate lens
Safety yellow powder coat finish
Stainless steel yoke mounting bracket
Stainless steel hardware
Weight: 2.7 lbs.

ELECTRICAL

120VAC, 60Hz
Input current (Amps): 0.13
Recessed 3-prong IEC type (C-14) plug (standard)
22in. cord (standard)

FEATURES

Mounting: Yoke Bracket (.50" clearance hole)
20° Square LED beam angle
5 Year Warranty

DL-LED-LH

CERTIFICATIONS

ETL/cETL
CSA-C22.2 No.250-08 (Wet Locations)
Suitable for dry locations

CONSTRUCTION

High temperature polymer housing
Safety yellow powder coat finish
Zinc plated yoke mounting bracket
Zinc plated steel hardware
Weight: 6.0 lbs.

ELECTRICAL

120VAC
3-prong IEC type (C-14) plug - standard
Input current (Amps): 2.08 (at max. 250W)
~12in. cord

FEATURES

Mounting: Yoke Bracket
Low cost
Optional guards (order separately, field installed)
Instant-on

Modular Arms

CERTIFICATIONS

ETL/cETL
CSA-C22.2 No.250-08 (Wet Locations)
Suitable for dry locations


CONSTRUCTION

1.6" Square, steel tubing (arms)
Safety yellow powder coat finish
Zinc plated mounting bracket
Washers at all joints and bushings at bracket joints

ELECTRICAL

120VAC
On/Off rocker switch with IEC type receptacle
3-prong wear-resistant cord
Female receptacle on arm (male plug on modular heads)

Accessories - Arms (Order separately, field installed)


Item #	Description	
DL-18-FAN		18" Blade 5,500 cfm Plugs into arm assembly

LED DOCK

LOADING DOCK & TASK LIGHTING

Trailer/Cargo Docks • Manufacturing Areas • Work Stations • Maintenance Pits


DIMENSIONS (MODULAR HEADS)

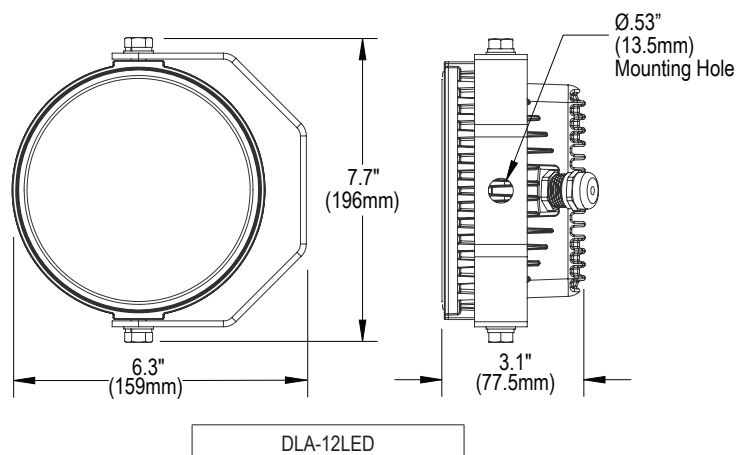

DIMENSIONS (MODULAR ARMS)


40 Inch Arm

120V 5-15P Plug

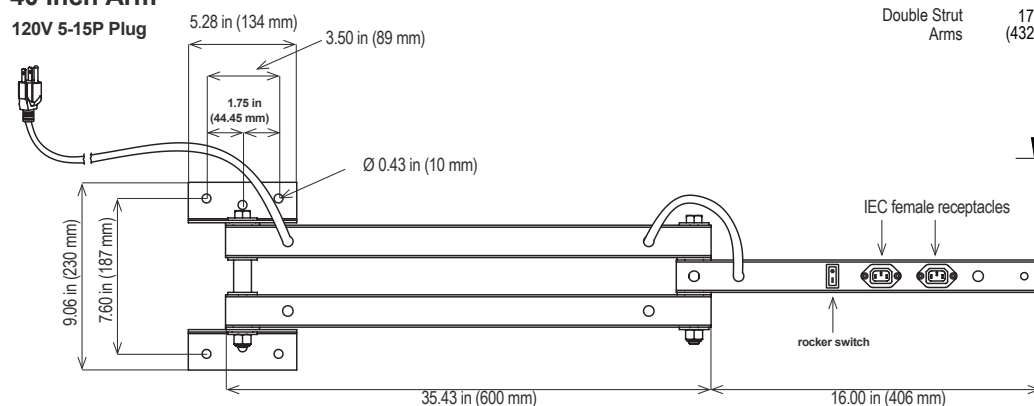


Wall Mount Plate Details


Double Strut Arms

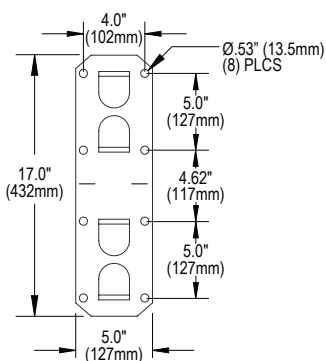

60 Inch Arm

120V 5-15P Plug

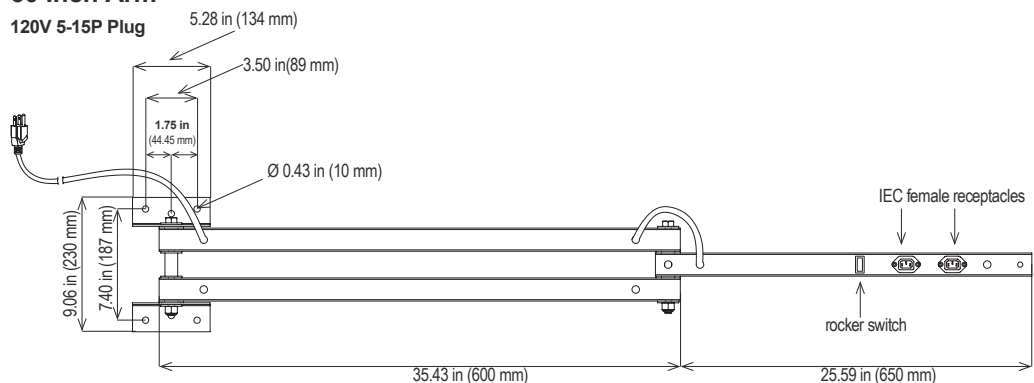

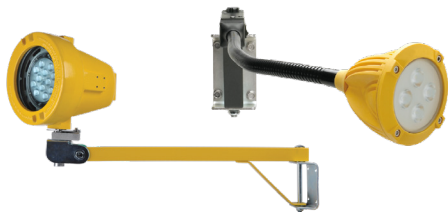

LED DOCK ASSEMBLIES

LOADING DOCK & TASK LIGHTING


Trailer/Cargo Docks • Refineries • Chemical Plants • Explosion Proof Environments

Complete Dock Light Assemblies

The all-in-one design of the complete series stands ready for general purpose, wet location, and explosion proof environments. These versatile dock/task lights designed for use in chemical plants, drilling rigs, refineries and any other locations where wet and hazardous chemicals and gases may exist. Constructed of rugged materials and built to withstand the occasional accidental impact, these fixtures are out-of-the-box ready to illuminate your work area.




DLAW2-12LED

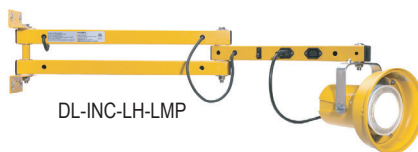

DL-INC-LH-LMP



DL-FLEX-120



DLXLED

Location	Item #	Arm Length	Source	CCT	Voltage
Explosion Proof	DLXLED-FL	26in. (Rigid)	39W / 2823Lm / 45° Optic (Flood)	5,100K	120-277V, 50-60Hz
	DLXLED-SP		39W / 2886Lm / 28° Optic (Spot)		
Wet Location	DL-INC-LH-LMP/DLSD-40-ARM-DS	40in. (Rigid)	18W, PAR 38 LED lamp Spring-loaded socket assembly	4,000K	120V, 60Hz
	DLA2-12LED/DLSD-40-ARM-DS		9W / 1,200Lm / 25° Square Beam Angle		
	DLAW2-12LED-SP-42-120	42in. (Rigid)	9W / 1,200Lm / 25° Spot Optic		
	DLAW2-12LED-FL-42-120		9W / 1,200Lm / 50° Flood Optic		
	DLAW2-12LED-SP-60-120	60in. (Rigid)	9W / 1,200Lm / 25° Spot Optic		
	DLAW2-12LED-FL-60-120		9W / 1,200Lm / 50° Flood Optic		
	DLA2-12LED/DLSD-60-ARM-DS		9W / 1,200Lm / 25° Square Beam Angle		
	DL-INC-LH-LMP/DLSD-60-ARM-DS		18W, PAR 38 LED lamp Spring-loaded socket assembly		
General	DL-FLEX-120	38.5in. (Flexible)	10W / 1100Lm / 20° Beam	4,000K	100-277VAC 120VAC

LED DOCK


LOADING DOCK & TASK LIGHTING

Trailer/Cargo Docks • Refineries • Chemical Plants • Explosion Proof Environments




DIMENSIONS



DLAW2-12LED (42")

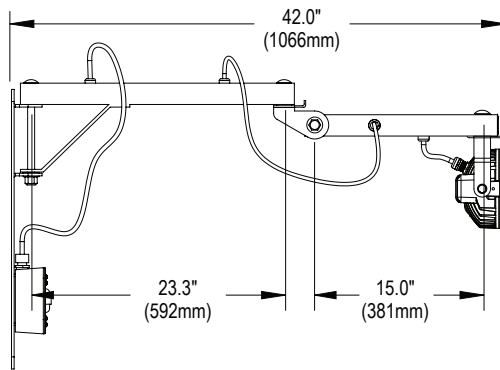


DLAW2-12LED (60")

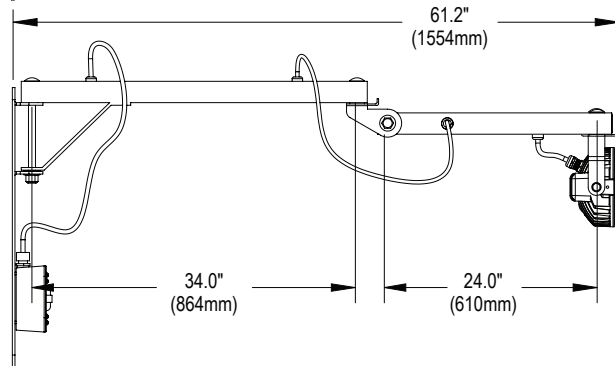


DLAW2
MOUNTING
PLATE

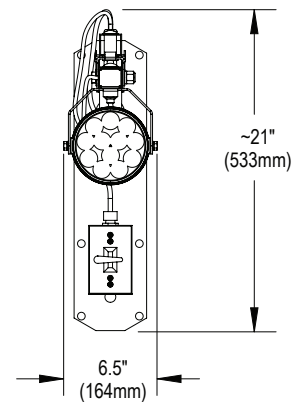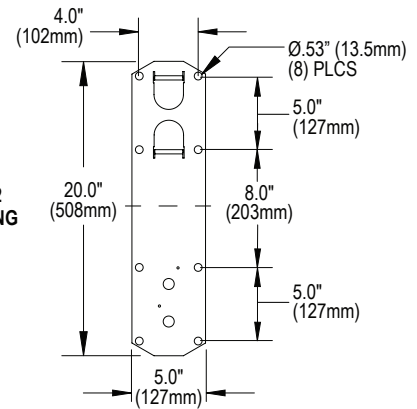

DLXLED

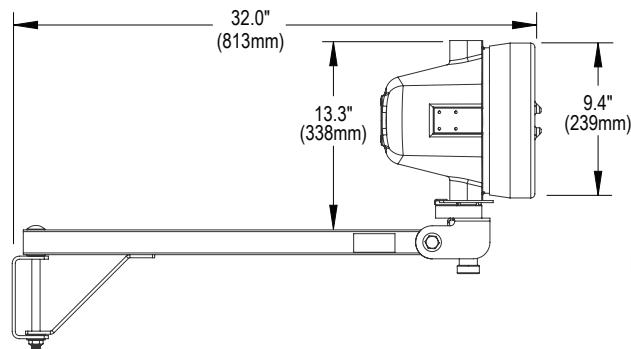

DLXLED / DL-FLEX-120
MOUNTING
PLATE

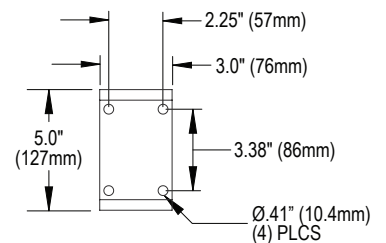

DL-FLEX-120

