



LE104


ORDINARY LOCATION LED LIGHTING

General Industrial • Task • Warehouses

The LE104 Series is a line of 4ft LED Open Industrial luminaires. It can be used in dry or damp ordinary locations making it ideal for locations such as warehouses, general industrial areas or other locations where task/area lighting is needed. These luminaires can be mounted vertically, horizontally, surface mounted, or hung.



2 Row with Angle Mount Option



1 SERIES	2 SOURCE	3 VOLTAGE	4 CCT	5 OPTIC	6 DIMMING	7 MOUNTING	8 OPTIONS	9 CORD OPTIONS
LE104	43: 43W (1 Row) 55: 55W (1 Row) 85: 85W (2 Row) 110: 110W (2 Row) 130: 130W (3 Row) 160: 160W (3 Row)	V1: 120-277VAC (50/60Hz)	3: 3,500K 4: 4,000K 5: 5,000K	A: Diffused Acrylic	Blank: None D1: 0-10V D2: DALI	SM*: Adjustable Surface Mount AM: Angle Mount *SM includes 0°, 30°, 45°, 60° angles	SP: Surge Protection EM: Battery/Driver Backup (90min.) WC: Wireless Control	WH: Wire Whip (10ft) CP: 6 Ft. Blunt End Cord CP1: 6 Ft. Cord w/120V Twist Lock Plug CP2: 6 Ft. Cord w/277V Twist Lock Plug CP3: 6 Ft. Cord w/120V Straight Blade Plug

CERTIFICATIONS

UL 1598 (Dry or Damp Locations)
CSA 22.2 No. 250.0
45°C Ambient Rating

CONSTRUCTION

Heavy-duty, open industrial fixture
Sturdy 20 gauge steel
4 ft. Length
Durable, white powder coat finish

FEATURES

Programmable Driver
0-10V or DALI
Reduced installation time
CRI >80
Emergency/Battery backup option available

*These products are Manufactured in the USA with both domestic and imported components; not all fixture configurations are compliant. Contact LDPI Sales with specific part number and requirement - Build America, Buy America, TAA or any other federal procurement act for compliance confirmation. Compliance confirmation can take up to 3 days.

3 Row with Surface Mount Option



Source	Voltage (VAC) 50/60Hz	Input Current (A)	Wattage (W)	CCT	Lumen Output* (Lm)
					Diffused Acrylic Optic
43 (1 Row)	120-277	0.36-0.16	43	3,500K	5434.21
				4,000K	5631.20
				5,000K	5710
55 (1 Row)		0.46-0.20	55	3,500K	6690.45
				4,000K	6932.99
				5,000K	7030
85 (2 Row)		0.71-0.31	85	3,500K	10478.22
				4,000K	10858.062
				5,000K	11010
110 (2 Row)		0.92-0.40	110	3,500K	12962.15
				4,000K	13432.04
				5,000K	13620
130 (3 Row)	1.08-0.47	130	3,500K	15607.88	
			4,000K	16173.68	
			5,000K	16400	
160 (3 Row)	1.33-0.58	160	3,500K	20080.87	
			4,000K	20808.82	
			5,000K	21100	
Emergency Mode			20	3,500K	2340
				4,000K	2430
				5,000K	2460



1-800-854-0021 www.ldpi-inc.com
LDPI® is a registered trademark of LDPI, Inc. © LDPI, Inc.

Product design and specifications subject to change without notice.
Visit www.ldpi-inc.com for the most current version and photometric data. v.06.04.26




LE104

ORDINARY LOCATION LED LIGHTING

General Industrial • Task • Warehouses





STANDARD DIMENSIONS

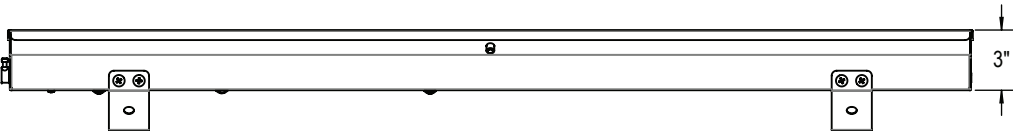

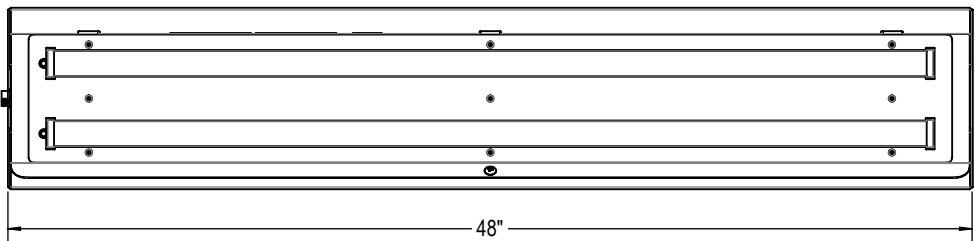


Rows	Dimensions*(in./mm)	
	A	B
1 & 2	6.5" (165mm)	9" (229mm)
3	9.9" (252mm)	12.5" (317mm)

LE104 ANGLE MOUNT

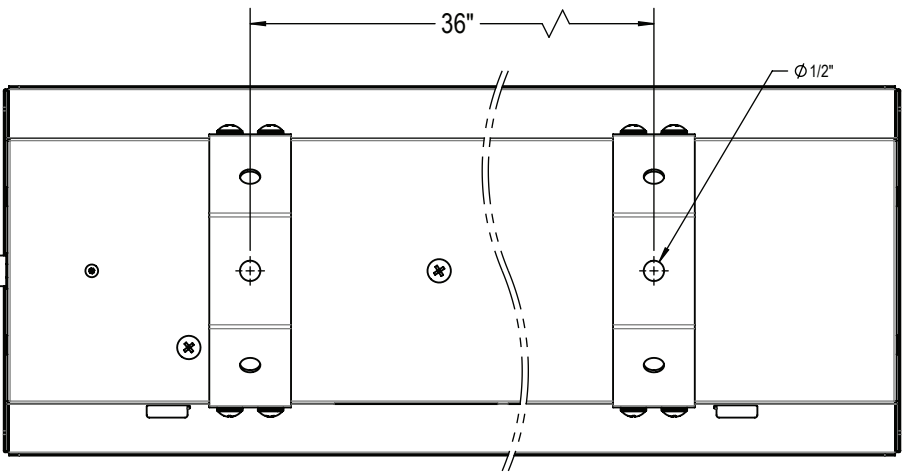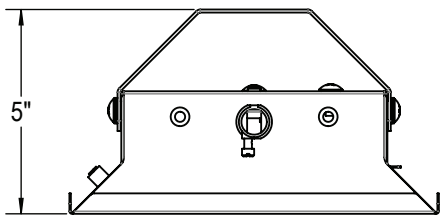

LE104 ADJUSTABLE SURFACE MOUNT

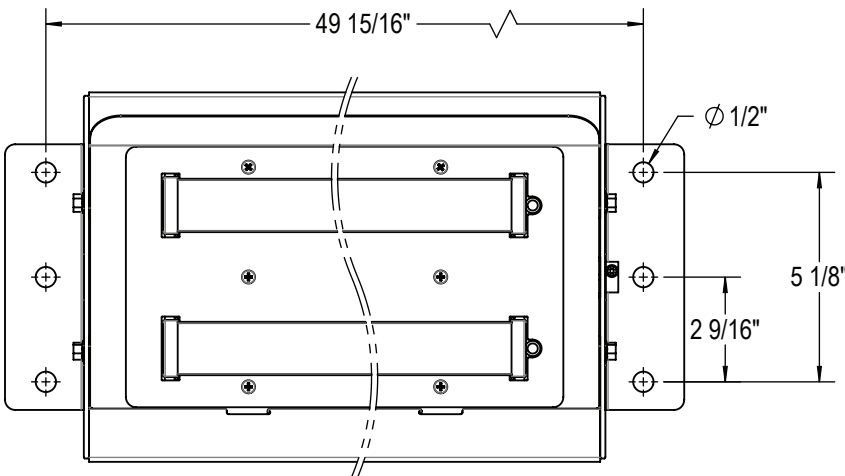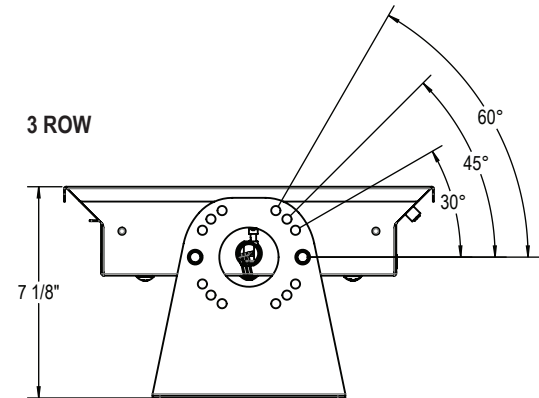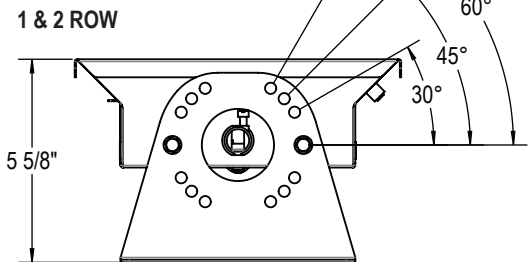

1-800-854-0021 www.ldpi-inc.com
LDPI® is a registered trademark of LDPI, Inc. © LDPI, Inc.

Product design and specifications subject to change without notice.
Visit www.ldpi-inc.com for the most current version and photometric data. v.06.04.26