




LE185R-2FT

GENERAL LED INDUSTRIAL LIGHTING

Clean Room

The LE185R-2FT Series is a hinged, rear access, recessed mount LED luminaire. The LE185R-2FT is made of a combination of 20 Ga. cold rolled steel and .090 aluminum. It is available in a 2 Ft. length with 1, 2, and 3 rows of LEDs. This fixture can be used with or without optics, has dimming capabilities, and is available with an EM option



1 SERIES	2 SOURCE	3 VOLTAGE	4 OPTIC	5 DIMMING	6 CCT	7 ADD-ON OPTIONS
LE185R-2FT	22: 22W (1 Row) 32: 32W (1 Row) 50: 50W (2 Row) 62: 62W (2 Row) 70: 70W (3 Row) 90: 90W (3 Row)	V1: 120-277VAC (50/60Hz)	Blank: None A: Diffused Acrylic	Blank: None D1: 0-10V D2: DALI	3: 3,500K 4: 4,000K 5: 5,000K	SP: Surge Protector (430 joules) EM: Battery/Driver Backup (90min.)
8 CORDS						
WH: Wire Whip (10ft) CP1: Cord 6Ft 120V Twist Lock CP2: Cord 6Ft 277V Twist Lock CP3: Cord 6ft 120V Straight Blade						

CERTIFICATIONS

UL1598 WET / DAMP
Lumen Maintenance (L70) >60,000 hrs. (reported)
CRI >80
-25°C to 55°C Ambient

CONSTRUCTION

20 gauge white powder coated steel housing
Hinged, rear access panel
Silicone free gaskets
Acrylic diffused lens (optional)
2 Ft. length
Clear tempered glass panel
1/2" NPT Hub(s)
Weights: Min: 23lbs. / Max: 43lbs.

ELECTRICAL

120-277VAC
10Ft. 3-wire whip (standard)
6kV Built-in driver surge protection

FEATURES

0-10V Dimming or DALI
Recess mount - Rear access
Emergency/Battery backup option available
5 year warranty

PERFORMANCE

Source	Voltage (VAC) 50/60Hz	Input Current (A)	Wattage (W)	CCT	Lumen Output* (Lm)	
					No Optic	Diffused Acrylic Optic
22 (1 Row)	120-277	.18-.07	22	3,500K	2705	2205
				4,000K	2750	2250
				5,000K	2800	2290
32 (1 Row)		.27-.12	32	3,500K	3830	3070
				4,000K	3910	3135
				5,000K	3950	3165
50 (2 Rows)		.42-.18	50	3,500K	6345	5025
				4,000K	6475	5180
				5,000K	6540	5230
62 (2 Rows)	.52-.22	62	3,500K	7685	6180	
			4,000K	7845	6305	
			5,000K	7925	6370	
70 (3 Rows)	.58-.25	70	3,500K	9335	7470	
			4,000K	9530	7625	
			5,000K	9625	7700	
90 (3 Rows)	.75-.32	90	3,500K	11500	9315	
			4,000K	11735	9510	
			5,000K	11855	9605	

*These products are Manufactured in the USA with both domestic and imported components; not all fixture configurations are compliant. Contact LDPI Sales with specific part number and requirement - Build America, Buy America, TAA or any other federal procurement act for compliance confirmation. Compliance confirmation can take up to 3 days.



LE185R-2FT

GENERAL LED INDUSTRIAL LIGHTING





Clean Room




DIMENSIONS

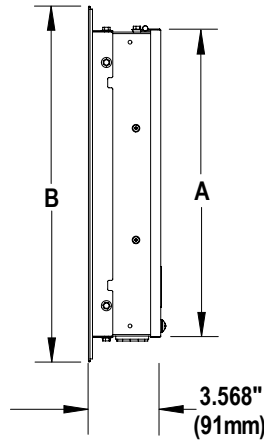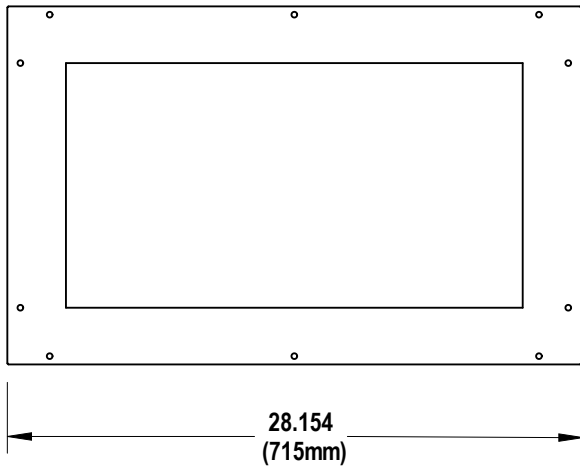

Source	Dimensions* (in./mm)	
	A	B
22W / 32W (1 Row)	10.219" (260mm)	13.065" (319mm)
50W / 62W (2 Row)	15.219" (387mm)	18.065 (446mm)
70W / 90W (3 Row)	20.219" (514mm)	23.065" (573mm)

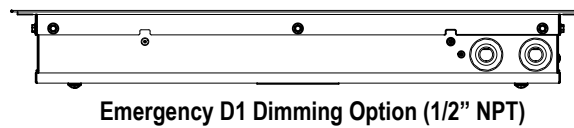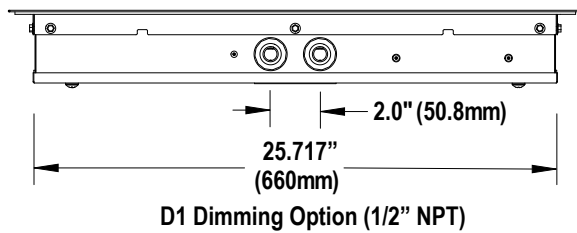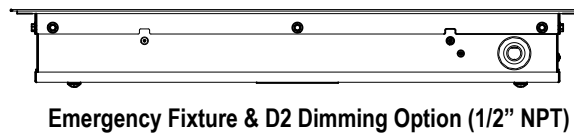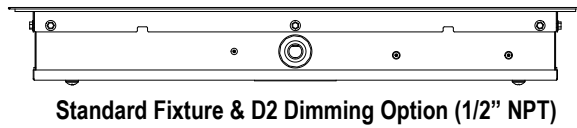

PANEL CUTOUT DIMENSIONS

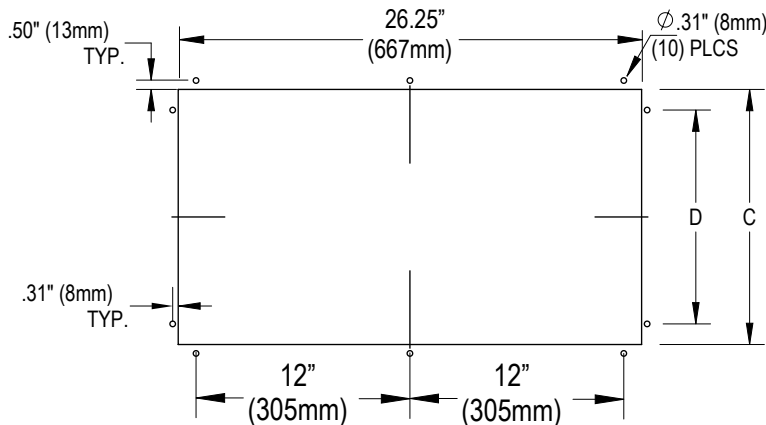

Source	Dimensions* (in./mm)	
	C	D
22W / 32W (1 Row)	10.75" (273mm)	7" (178mm)
50W / 62W (2 Row)	15.75" (400mm)	12" (305mm)
70W / 90W (3 Row)	20.75" (527mm)	17" (432mm)